

AUTOMATIC HOSE REELS

These automatic hose reels with spring, fixed or swivelling, powder coated, stainless steel AISI 304 and hydraulics powered, pneumatics, electrical are suitable for flexible hoses for the delivery of compressed air, water, oil and similar, grease, diesel fuel, antifreeze liquid, windscreen liquid and ad-blue.

The spring hose allows to untwist only the necessary length, improving the working and functionality.

The hose winding is fast and safe and it allows a work place which give the possibility to work in a free and tidy way, you have always a ready equipment giving to all staffs the warranty to work in a safety way.



AUTOMATIC HOSE REELS VARNISHED FIXED-SWIVELLING WITH HOSE




| | | |
|------------------------------|---------|---------|
| AIR-WATER | 20 bar | pg. 164 |
| WATER 150 °C | 200 bar | pg. 168 |
| WATER 150 °C | 400 bar | pg. 170 |
| OIL | 160 bar | pg. 172 |
| GREASE | 600 bar | pg. 174 |
| DIESEL | 10 bar | pg. 176 |
| ANTIFREEZE-WINDSCREEN-ADBLUE | 20 bar | pg. 178 |

AUTOMATIC HOSE REELS VARNISHED FIXED-SWIVELLING



| | |
|-------------------------|---------|
| FIXED WITHOUT HOSE | pg. 180 |
| SWIVELLING WITHOUT HOSE | pg. 181 |

STAINLESS STEEL AUTOMATIC HOSE REELS FIXED-SWIVELLING WITH HOSE

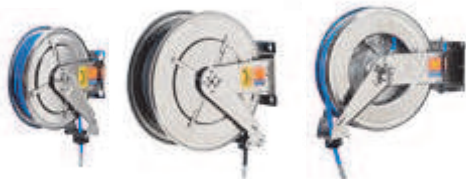

| | | |
|------------------------------|---------|---------|
| AIR-WATER | 20 bar | pg. 182 |
| WATER 150 °C | 200 bar | pg. 186 |
| WATER 150 °C | 400 bar | pg. 188 |
| DIESE | 10 bar | pg. 190 |
| ANTIFREEZE-WINDSCREEN-ADBLUE | 20 bar | pg. 192 |

STAINLESS STEEL AUTOMATIC HOSE REELS FIXED-SWIVELLING



| | |
|-------------------------|---------|
| FIXED WITHOUT HOSE | pg. 194 |
| SWIVELLING WITHOUT HOSE | pg. 195 |

CLOSED HOSE REELS SWIVELLING IN PLASTIC



| | | |
|-----------|--------|---------|
| AIR-WATER | 10 bar | pg. 197 |
|-----------|--------|---------|

CLOSED HOSE REELS VARNISHED FIXED-SWIVELLING

| | | |
|-----------|--------|---------|
| AIR-WATER | 20 bar | pg. 197 |
|-----------|--------|---------|

CLOSED HOSE REELS VARNISHED FIXED-SWIVELLING



| | | |
|------------------------------|---------|---------|
| AIR-WATER | 20 bar | pg. 198 |
| WATER 150 °C | 200 bar | pg. 198 |
| WATER 150 °C | 400 bar | pg. 198 |
| OIL | 160 bar | pg. 200 |
| GREASE | 600 bar | pg. 200 |
| ANTIFREEZE-WINDSCREEN-ADBLUE | 20 bar | pg. 200 |

STAINLESS STEEL CLOSED HOSE REELS FIXED-SWIVELLING



| | | |
|--------------|---------|---------|
| AIR-WATER | 20 bar | pg. 202 |
| WATER 150 °C | 200 bar | pg. 202 |
| WATER 150 °C | 400 bar | pg. 202 |

INDUSTRIAL HOSE REELS VARNISHED HIDRAULIC POWERED SERIES

| | | |
|-----------------|---------|---------|
| AIR-WATER | 20 bar | pg. 205 |
| WATER 150 °C | 200 bar | pg. 205 |
| OIL AND SIMILAR | 140 bar | pg. 205 |
| GREASE | 400 bar | pg. 205 |
| DIESEL | 10 bar | pg. 205 |



INDUSTRIAL HOSE REELS VARNISHED PNEUMATIC POWERED SERIES

| | | |
|-------------------|---------|---------|
| AIR-WATER | 20 bar | pg. 206 |
| WATER 150 °C | 200 bar | pg. 206 |
| OIL AND SIMILAR 1 | 140 bar | pg. 206 |
| GREASE | 400 bar | pg. 206 |
| DIESEL | 10 bar | pg. 206 |



INDUSTRIAL HOSE REELS VARNISHED ELECTRICAL POWERED SERIES 12V

| | | |
|-----------------|---------|---------|
| AIR-WATER | 20 bar | pg. 207 |
| WATER 150 °C | 200 bar | pg. 207 |
| OIL AND SIMILAR | 140 bar | pg. 207 |
| GREASE | 400 bar | pg. 207 |
| DIESEL | 10 bar | pg. 207 |



INDUSTRIAL HOSE REELS VARNISHED ELECTRICAL POWERED SERIES 24V

| | | |
|-----------------|---------|---------|
| AIR-WATER | 20 bar | pg. 208 |
| WATER 150 °C | 200 bar | pg. 208 |
| OIL AND SIMILAR | 140 bar | pg. 208 |
| GREASE | 400 bar | pg. 208 |
| DIESEL | 10 bar | pg. 208 |



INDUSTRIAL HOSE REELS VARNISHED MANUAL SERIES

| | | |
|-----------------|---------|---------|
| AIR-WATER | 20 bar | pg. 209 |
| WATER 150 °C | 200 bar | pg. 209 |
| OIL AND SIMILAR | 140 bar | pg. 209 |
| DIESEL | 10 bar | pg. 209 |



ACCESSORIES FOR HOSE REELS

| | |
|--------------------------|---------|
| PANEL SUPPORT HOSE REELS | pg. 210 |
| ORIENTABLE SUPPORT | pg. 211 |
| SWIVELING JOINT | pg. 212 |
| FASTENING CONNECTION | pg. 213 |
| RUBBER HOSE STOP | pg. 214 |
| HOSES FOR HOSE REELS | pg. 214 |





AUTOMATIC HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|----------------------|
| 070-1201-300 | Without hose | - | F3/8"G - M3/8"G |
| 070-1201-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1201-215 | 15 m | 8x12 | F3/8"G - M1/4"G gir. |
| 070-1201-220 | 20 m | 8x12 | F3/8"G - M1/4"G gir. |
| 070-1201-310 | 10 m | 10x14 | F3/8"G - M3/8"G |
| 070-1201-315 | 15 m | 10x14 | F3/8"G - M3/8"G |
| 070-1201-410 | 10 m | 13x19 | M1/2"G - M1/2"G |




F-460

| | | | |
|--------------|--------------|-------|-----------------|
| 070-1301-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1301-320 | 20 m | 10X14 | M1/2"G - M3/8"G |
| 070-1301-415 | 15 m | 13X19 | M1/2"G - M1/2"G |
| 070-1301-418 | 18 m | 13X19 | M1/2"G - M1/2"G |




F-550

| | | | |
|--------------|--------------|-------|-----------------|
| 070-1401-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1401-420 | 20 m | 13X19 | M1/2"G - M1/2"G |
| 070-1401-425 | 25 m | 13X19 | M1/2"G - M1/2"G |

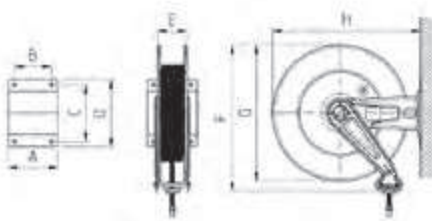


OVERALL DIMENSIONS FIXED


| Mod. | A | B | C | D | E | F | G | H | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<28,00 | 0,085 | 1 |



Wall application with inside output hose



Wall application with outside output hose



Wall and ceiling application with frontal output hose



Application bench with frontal output hose

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|------------------------|
| 071-1201-300 | Without hose | - | F3/8" G - M3/8" G |
| 071-1201-400 | Without hose | - | M1/2" G - M1/2" G |
| 071-1201-215 | 15 m | 8x12 | F3/8" G - M1/4" G gir. |
| 071-1201-220 | 20 m | 8x12 | F3/8" G - M1/4" G gir. |
| 071-1201-310 | 10 m | 10x14 | F3/8" G - M3/8" G |
| 071-1201-315 | 15 m | 10x14 | F3/8" G - M3/8" G |
| 071-1201-410 | 10 m | 13x19 | M1/2" G - M1/2" G |

S-400



| | | | |
|--------------|--------------|-------|-------------------|
| 071-1301-400 | Without hose | - | M1/2" G - M1/2" G |
| 071-1301-320 | 20 m | 10X14 | M1/2" G - M3/8" G |
| 071-1301-415 | 15 m | 13X19 | M1/2" G - M1/2" G |
| 071-1301-418 | 18 m | 13X19 | M1/2" G - M1/2" G |

S-460






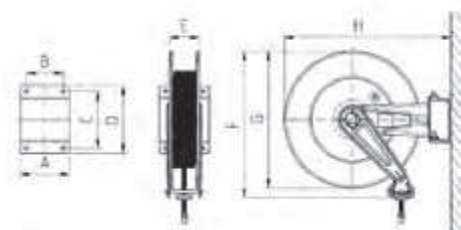
| | | | |
|--------------|--------------|-------|-------------------|
| 071-1401-400 | Without hose | - | M1/2" G - M1/2" G |
| 071-1401-420 | 20 m | 13X19 | M1/2" G - M1/2" G |
| 071-1401-425 | 25 m | 13X19 | M1/2" G - M1/2" G |

S-550




OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  | |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | <20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | <24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | <29,00 | 0,085 | 1 |




Wall application with inside output hose



Wall application with outside output hose



Wall and ceiling application with frontal outside hose



The insertion of the hose reel in the wall bracket is with quick disconnect coupling

AUTOMATIC HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-------------------|
| 070-1201-300 | Without hose | - | F3/8" G - M3/8" G |
| 070-1201-400 | Without hose | - | M1/2" G - M1/2" G |
| 070-1202-212 | 12 m | 5/16" | F3/8" G - M1/4" G |
| 070-1202-218 | 18 m | 5/16" | F3/8" G - M1/4" G |
| 070-1202-310 | 10 m | 3/8" | F3/8" G - M3/8" G |
| 070-1202-318 | 18 m | 3/8" | F3/8" G - M3/8" G |
| 070-1202-410 | 10 m | 1/2" | M1/2" G - M1/2" G |



F-460

| | | | |
|--------------|--------------|------|-------------------|
| 070-1301-400 | Without hose | - | M1/2" G - M1/2" G |
| 070-1302-320 | 20 m | 3/8" | M1/2" G - M3/8" G |
| 070-1302-415 | 15 m | 1/2" | M1/2" G - M1/2" G |
| 070-1302-418 | 18 m | 1/2" | M1/2" G - M1/2" G |



F-550

| | | | |
|--------------|--------------|------|-------------------|
| 070-1401-400 | Without hose | - | M1/2" G - M1/2" G |
| 070-1402-420 | 20 m | 1/2" | M1/2" G - M1/2" G |
| 070-1402-425 | 25 m | 1/2" | M1/2" G - M1/2" G |



F-555




| | | | |
|--------------|--------------|------|-------------------|
| 070-1502-400 | Without hose | - | M1/2" G - M1/2" G |
| 070-1502-600 | Without hose | - | F1" G - M1" G |
| 070-1502-430 | 30 m | 1/2" | M1/2" G - M1/2" G |
| 070-1502-515 | 15 m | 3/4" | F3/4" G - M3/4" G |
| 070-1502-520 | 20 m | 3/4" | F3/4" G - M3/4" G |
| 070-1502-615 | 15 m | 1" | F1" G - M1" G |




F-560

| | | | |
|--------------|--------------|------|-------------------|
| 070-1602-600 | Without hose | - | F1" G - M1" G |
| 070-1602-530 | 30 m | 3/4" | F3/4" G - M3/4" G |
| 070-1602-540 | 40 m | 3/4" | F3/4" G - M3/4" G |
| 070-1602-620 | 20 m | 1" | F1" G - M1" G |
| 070-1602-630 | 30 m | 1" | F1" G - M1" G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  Kg |  m ³ |  m ³ |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

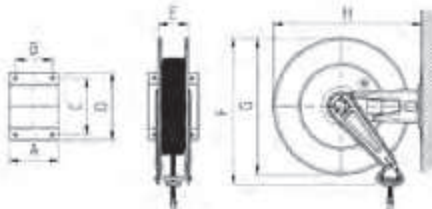

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1201-300 | Without hose | - | F3/8"G - M3/8"G |
| 071-1201-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1202-212 | 12 m | 5/16" | F3/8"G - M1/4"G |
| 071-1202-218 | 18 m | 5/16" | F3/8"G - M1/4"G |
| 071-1202-310 | 10 m | 3/8" | F3/8"G - M3/8"G |
| 071-1202-318 | 18 m | 3/8" | F3/8"G - M3/8"G |
| 071-1202-410 | 10 m | 1/2" | M1/2"G - M1/2"G |

| | | | |
|--------------|--------------|------|-----------------|
| 071-1301-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1302-320 | 20 m | 3/8" | M1/2"G - M3/8"G |
| 071-1302-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 071-1302-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

| | | | |
|--------------|--------------|------|-----------------|
| 071-1401-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1402-420 | 20 m | 1/2" | M1/2"G - M1/2"G |
| 071-1402-425 | 25 m | 1/2" | M1/2"G - M1/2"G |

| | | | |
|--------------|--------------|------|-----------------|
| 071-1502-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1502-600 | Without hose | - | F1"G - M1"G |
| 071-1502-430 | 30 m | 1/2" | M1/2"G - M1/2"G |
| 071-1502-515 | 15 m | 3/4" | F3/4"G - M3/4"G |
| 071-1502-520 | 20 m | 3/4" | F3/4"G - M3/4"G |
| 071-1502-615 | 15 m | 1" | F1"G - M1"G |

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

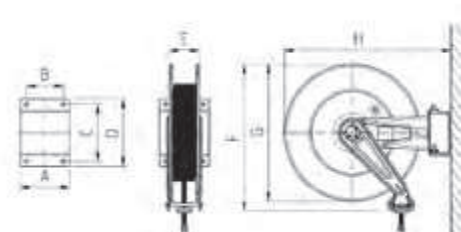

AUTOMATIC HOSE REELS VARNISHED FIXED FOR WATER 150 °C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1205-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1205-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1204-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 070-1204-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 070-1204-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 070-1204-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

F-460

| | | | |
|--------------|--------------|-------|-----------------|
| 070-1305-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1305-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1304-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 070-1304-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 070-1304-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 070-1304-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

F-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-1405-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1405-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1404-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 070-1404-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 070-1404-420 | 20 m | 1/2" | M1/2"G - F1/2"G |




F-555


| | | | |
|--------------|--------------|------|-----------------|
| 070-1505-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1505-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1504-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 070-1504-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 070-1504-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

F-560

| | | | |
|--------------|--------------|------|-----------------|
| 070-1605-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1604-340 | 40 m | 3/8" | M1/2"G - F3/8"G |
| 070-1604-440 | 40 m | 1/2" | M1/2"G - F1/2"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

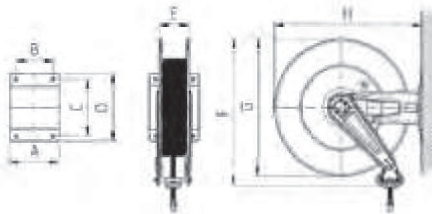

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR WATER 150 °C 200 bar



Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1205-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1205-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1204-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 071-1204-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 071-1204-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 071-1204-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

S-400



| | | | |
|--------------|--------------|-------|-----------------|
| 071-1305-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1305-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1304-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 071-1304-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 071-1304-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 071-1304-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

S-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-1405-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1405-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1404-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 071-1404-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 071-1404-420 | 20 m | 1/2" | M1/2"G - F1/2"G |

S-550




| | | | |
|--------------|--------------|------|-----------------|
| 071-1505-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1505-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1504-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 071-1504-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 071-1504-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

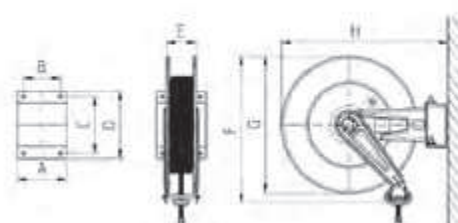

AUTOMATIC HOSE REELS VARNISHED FIXED FOR WATER 150 °C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1205-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1205-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1205-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 070-1205-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 070-1205-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 070-1205-410 | 10 m | 1/2" | M1/2"G - F1/2"G |



F-460

| | | | |
|--------------|--------------|-------|-----------------|
| 070-1305-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1305-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1305-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 070-1305-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 070-1305-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 070-1305-415 | 15 m | 1/2" | M1/2"G - F1/2"G |



F-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-1405-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1405-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1405-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 070-1405-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 070-1405-420 | 20 m | 1/2" | M1/2"G - F1/2"G |



F-555




| | | | |
|--------------|--------------|------|-----------------|
| 070-1505-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1505-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1505-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 070-1505-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 070-1505-430 | 30 m | 1/2" | M1/2"G - F1/2"G |




F-560

| | | | |
|--------------|--------------|------|-----------------|
| 070-1605-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1605-340 | 40 m | 3/8" | M1/2"G - F3/8"G |
| 070-1605-440 | 40 m | 1/2" | M1/2"G - F1/2"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

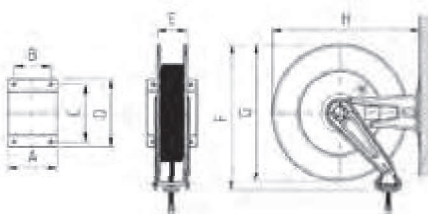

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR WATER 150 °C 400 bar



Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1205-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1205-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1205-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 071-1205-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 071-1205-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 071-1205-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

S-400



| | | | |
|--------------|--------------|-------|-----------------|
| 071-1305-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1305-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1305-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 071-1305-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 071-1305-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 071-1305-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

S-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-1405-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1405-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1405-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 071-1405-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 071-1405-420 | 20 m | 1/2" | M1/2"G - F1/2"G |

S-550






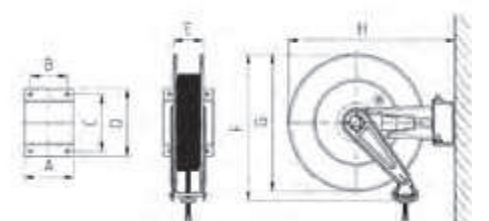
| | | | |
|--------------|--------------|------|-----------------|
| 071-1505-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1505-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1505-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 071-1505-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 071-1505-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |



AUTOMATIC HOSE REELS VARNISHED FIXED FOR OIL 160 bar

- Equipped with:
- Synthetic black rubber hoses 1SC
 - Galvanized connections
 - Swivelling joint 90° galvanized
 - Polyurethane seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1206-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1206-310 | 10 m | 3/8" | M1/2"G - M1/2"G |
| 070-1206-410 | 10 m | 1/2" | M1/2"G - M1/2"G |



F-460

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1306-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1306-315 | 15 m | 3/8" | M1/2"G - M1/2"G |
| 070-1306-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 070-1306-418 | 18 m | 1/2" | M1/2"G - M1/2"G |



F-550

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1406-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1406-420 | 20 m | 1/2" | M1/2"G - M1/2"G |
| 070-1406-425 | 25 m | 1/2" | M1/2"G - M1/2"G |



F-555




| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1506-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-1506-500 | Without hose | - | M3/4"G - M3/4"G |
| 070-1506-600 | Without hose | - | M1"G - M1"G |
| 070-1506-430 | 30 m | 1/2" | M1/2"G - M1/2"G |
| 070-1506-515 | 15 m | 3/4" | M3/4"G - M3/4"G |
| 070-1506-520 | 20 m | 3/4" | M3/4"G - M3/4"G |
| 070-1506-615 | 15 m | 1" | M1"G - M1"G |




F-560

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1606-500 | Without hose | - | M3/4"G - M3/4"G |
| 070-1606-600 | Without hose | - | M1"G - M1"G |
| 070-1606-525 | 25 m | 3/4" | M3/4"G - M3/4"G |
| 070-1606-530 | 30 m | 3/4" | M3/4"G - M3/4"G |
| 070-1606-620 | 20 m | 1" | M1"G - M1"G |
| 070-1606-630 | 30 m | 1" | M1"G - M1"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

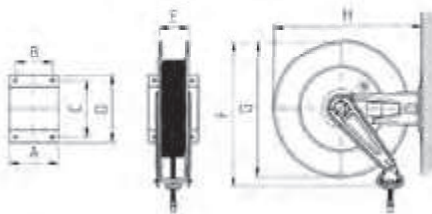

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR OIL 160 bar



Equipped with:

- Synthetic black rubber hoses 1SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1206-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1206-310 | 10 m | 3/8" | M1/2"G - M1/2"G |
| 071-1206-410 | 10 m | 1/2" | M1/2"G - M1/2"G |

S-400



| | | | |
|--------------|--------------|------|-----------------|
| 071-1306-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1306-315 | 15 m | 3/8" | M1/2"G - M1/2"G |
| 071-1306-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 071-1306-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

S-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-1406-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1406-420 | 20 m | 1/2" | M1/2"G - M1/2"G |
| 071-1406-425 | 25 m | 1/2" | M1/2"G - M1/2"G |

S-550




| | | | |
|--------------|--------------|------|-----------------|
| 071-1506-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1506-500 | Without hose | - | M3/4"G - M3/4"G |
| 071-1506-600 | Without hose | - | M1"G - M1"G |
| 071-1506-430 | 30 m | 1/2" | M1/2"G - M1/2"G |
| 071-1506-515 | 15 m | 3/4" | M3/4"G - M3/4"G |
| 071-1506-520 | 20 m | 3/4" | M3/4"G - M3/4"G |
| 071-1506-615 | 15 m | 1" | M1"G - M1"G |

S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

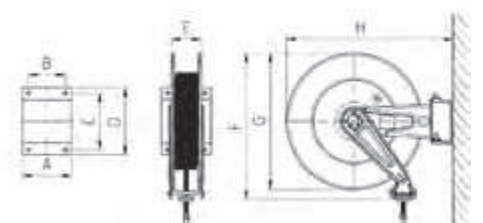

AUTOMATIC HOSE REELS VARNISHED FIXED FOR GREASE 600 bar

- Equipped with:
- Synthetic black rubber hoses 2SC
 - Galvanized connections
 - Swivelling joint 90° galvanized
 - Polyurethane seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1207-200 | Without hose | - | M1/4"G - M1/4"G |
| 070-1207-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1207-110 | 10 m | 1/4" | M1/4"G - M1/4"G |
| 070-1207-115 | 15 m | 1/4" | M1/4"G - M1/4"G |
| 070-1207-310 | 10 m | 3/8" | M3/8"G - M1/4"G |



F-460

| | | | |
|--------------|--------------|------|-----------------|
| 070-1307-200 | Without hose | - | M1/4"G - M1/4"G |
| 070-1307-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1307-118 | 18 m | 1/4" | M1/4"G - M1/4"G |
| 070-1307-315 | 15 m | 3/8" | M3/8"G - M1/4"G |



F-550


| | | | |
|--------------|--------------|------|-----------------|
| 070-1407-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1407-320 | 20 m | 3/8" | M3/8"G - M1/4"G |
| 070-1407-325 | 25 m | 3/8" | M3/8"G - M1/4"G |






F-555

| | | | |
|--------------|--------------|------|-----------------|
| 070-1507-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-1507-330 | 30 m | 3/8" | M3/8"G - M1/4"G |

OVERALL DIMENSIONS FIXED

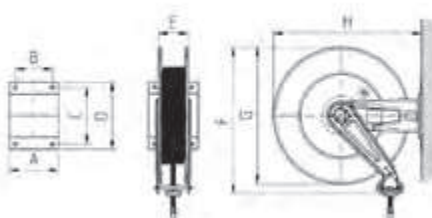

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR GREASE 600 bar



Equipped with:

- Synthetic black rubber hoses 2SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1207-200 | Without hose | - | M1/4"G - M1/4"G |
| 071-1207-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1207-110 | 10 m | 1/4" | M1/4"G - M1/4"G |
| 071-1207-115 | 15 m | 1/4" | M1/4"G - M1/4"G |
| 071-1207-310 | 10 m | 3/8" | M3/8"G - M1/4"G |

S-400



| | | | |
|--------------|--------------|------|-----------------|
| 071-1307-200 | Without hose | - | M1/4"G - M1/4"G |
| 071-1307-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1307-118 | 18 m | 1/4" | M1/4"G - M1/4"G |
| 071-1307-315 | 15 m | 3/8" | M3/8"G - M1/4"G |

S-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-1407-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1407-320 | 20 m | 3/8" | M3/8"G - M1/4"G |
| 071-1407-325 | 25 m | 3/8" | M3/8"G - M1/4"G |

S-550




| | | | |
|--------------|--------------|------|-----------------|
| 071-1507-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-1507-330 | 30 m | 3/8" | M3/8"G - M1/4"G |

S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | Kg | m³ | 1 |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

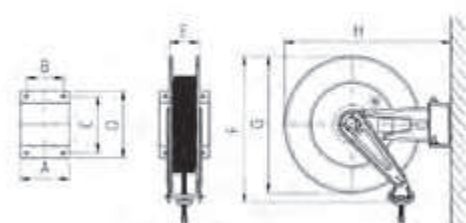

AUTOMATIC HOSE REELS VARNISHED FIXED FOR DIESEL 10 bar

Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals



F-550

| Article | Delivery | Hose length | Ø hose | Inlet-outlet |
|--------------|----------|--------------|--------|---------------|
| 070-1408-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-1408-510 | 90 l/min | 10 m | 3/4" | F1" G - M1" G |
| 070-1408-515 | 85 l/min | 15m | 3/4" | F1" G - M1" G |
| 070-1408-610 | 95 l/min | 10m | 1" | F1" G - M1" G |



F-555

| | | | | |
|--------------|----------|--------------|------|---------------|
| 070-1508-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-1508-520 | 83 l/min | 20 m | 3/4" | F1" G - M1" G |
| 070-1508-615 | 90 l/min | 15 m | 1" | F1" G - M1" G |






F-560

| | | | | |
|--------------|----------|--------------|------|---------------|
| 070-1608-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-1608-530 | 80 l/min | 30 m | 3/4" | F1" G - M1" G |
| 070-1608-540 | 75 l/min | 40 m | 3/4" | F1" G - M1" G |
| 070-1608-620 | 87 l/min | 20 m | 1" | F1" G - M1" G |
| 070-1608-630 | 85 l/min | 30 m | 1" | F1" G - M1" G |



OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR DIESEL 10 bar



Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals

| Article | Delivery | Hose length | Ø hose | Inlet-outlet |
|--------------|----------|--------------|--------|---------------|
| 071-1408-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 071-1408-510 | 90 l/min | 10 m | 3/4" | F1" G - M1" G |
| 071-1408-515 | 85 l/min | 15m | 3/4" | F1" G - M1" G |
| 071-1408-610 | 95 l/min | 10m | 1" | F1" G - M1" G |

S-550






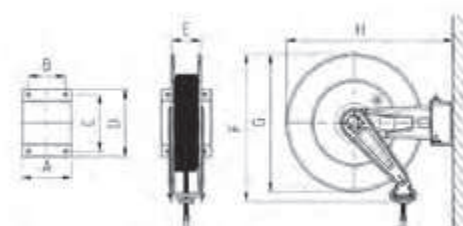
| | | | | |
|--------------|----------|--------------|------|---------------|
| 071-1508-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 071-1508-520 | 83 l/min | 20 m | 3/4" | F1" G - M1" G |
| 071-1508-615 | 90 l/min | 15 m | 1" | F1" G - M1" G |

S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  Kg |  m³ |  | |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|--|---|
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | <45,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00 | <54,00 | 0,100 | 1 |



Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals



F-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-1209-400 | Without hose | - | M1/2”G – M1/2”G |
| 070-1209-410 | 10 m | 1/2” | M1/2”G – M1/2”G |




F-460

| | | | |
|--------------|--------------|------|-----------------|
| 070-1309-400 | Without hose | - | M1/2”G – M1/2”G |
| 070-1309-415 | 15 m | 1/2” | M1/2”G – M1/2”G |






F-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-1409-500 | Without hose | - | F3/4”G – M3/4”G |
| 070-1409-510 | 10 m | 3/4” | F3/4”G – M3/4”G |
| 070-1409-515 | 15 m | 3/4” | F3/4”G – M3/4”G |

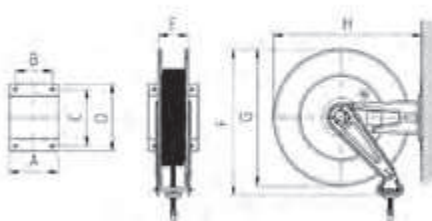

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |

AUTOMATIC HOSE REELS VARNISHED SWIVELLING FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar



Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-1209-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1209-410 | 10 m | 1/2" | M1/2"G - M1/2"G |

S-400



| | | | |
|--------------|--------------|------|-----------------|
| 071-1309-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-1309-415 | 15 m | 1/2" | M1/2"G - M1/2"G |

S-460






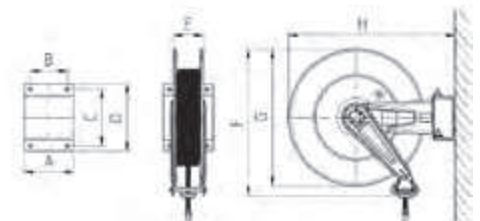
| | | | |
|--------------|--------------|------|-----------------|
| 071-1409-500 | Without hose | - | F3/4"G - M3/4"G |
| 071-1409-510 | 10 m | 3/4" | F3/4"G - M3/4"G |
| 071-1409-515 | 15 m | 3/4" | F3/4"G - M3/4"G |

S-550



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |



AUTOMATIC HOSE REELS VARNISHED FIXED WITHOUT HOSE

F-400



| Article | Type of delivery fluid | Swivelling joint 90° | Seals | Inlet-outlet |
|--------------|------------------------------|----------------------|--------------|-----------------|
| 070-1201-300 | Air-water 20 bar | brass | viton | F3/8"G – M3/8"G |
| 070-1201-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 070-1205-300 | Water 150° C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 070-1205-400 | Water 150° C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 070-1206-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 070-1207-200 | Grease 600 bar | galvanized steel | polyurethane | M1/4"G – M1/4"G |
| 070-1207-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 070-1209-400 | Antifreeze-windscreen 20 bar | Stainless steel | viton | M1/2"G – M1/2"G |

F-460



| | | | | |
|--------------|------------------------------|------------------|--------------|-----------------|
| 070-1301-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 070-1305-300 | Water 150° C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 070-1305-400 | Water 150° C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 070-1306-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 070-1307-200 | Grease 600 bar | galvanized steel | polyurethane | M1/4"G – M1/4"G |
| 070-1307-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 070-1309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G – M1/2"G |

F-550



| | | | | |
|--------------|----------------------|------------------|--------------|-----------------|
| 070-1401-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 070-1405-300 | Water 150° C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 070-1405-400 | Water 150° C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 070-1406-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 070-1407-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 070-1408-600 | Diesel 10 bar | galvanized steel | viton | F1"G – M1"G |
| 070-1409-500 | Adblue 20 bar | stainless steel | viton | F3/4"G – M3/4"G |

F-555






| | | | | |
|--------------|----------------------|------------------|--------------|-----------------|
| 070-1502-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 070-1502-600 | Air-water 20 bar | brass | viton | F1"G – M1"G |
| 070-1505-300 | Water 150° C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 070-1505-400 | Water 150° C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 070-1506-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 070-1506-500 | Oil 160 bar | galvanized steel | polyurethane | M3/4"G – M3/4"G |
| 070-1506-600 | Oil 160 bar | galvanized steel | polyurethane | M1"G – M1"G |
| 070-1507-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 070-1508-600 | Diesel 10 bar | galvanized steel | viton | F1"G – M1"G |


F-560



| | | | | |
|--------------|----------------------|------------------|--------------|-----------------|
| 070-1602-600 | Air-water 20 bar | brass | viton | F1"G – M1"G |
| 070-1605-400 | Water 150° C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 070-1606-500 | Oil 160 bar | galvanized steel | polyurethane | M3/4"G – M3/4"G |
| 070-1606-600 | Oil 160 bar | galvanized steel | polyurethane | M1"G – M1"G |
| 070-1608-600 | Diesel 10 bar | galvanized steel | viton | F1"G – M1"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| F-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50 | 0,046 | 1 |
| F-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50 | 0,060 | 1 |
| F-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00 | 0,085 | 1 |
| F-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00 | 0,100 | 1 |
| F-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00 | 0,180 | 1 |

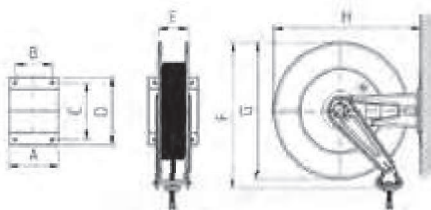

AUTOMATIC HOSE REELS VARNISHED SWIVELLING WITHOUT HOSE



| Article | Type of delivery fluid | Swivelling joint 90° | Seals | Inlet-outlet |
|--------------|------------------------------|----------------------|--------------|-----------------|
| 071-1201-300 | Air-water 20 bar | brass | viton | F3/8"G – M3/8"G |
| 071-1201-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 071-1205-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 071-1205-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 071-1206-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 071-1207-200 | Grease 600 bar | galvanized steel | polyurethane | M1/4"G – M1/4"G |
| 071-1207-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 071-1209-400 | Antifreeze-windscreen 20 bar | Stainless steel | viton | M1/2"G – M1/2"G |
| 071-1301-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 071-1305-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 071-1305-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 071-1306-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 071-1307-200 | Grease 600 bar | galvanized steel | polyurethane | M1/4"G – M1/4"G |
| 071-1307-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 071-1309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 071-1401-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 071-1405-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 071-1405-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 071-1406-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 071-1407-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 071-1408-600 | Diesel 10 bar | galvanized steel | viton | F1"G – M1"G |
| 071-1409-500 | Adblue 20 bar | stainless steel | viton | F3/4"G – M3/4"G |
| 071-1502-400 | Air-water 20 bar | brass | viton | M1/2"G – M1/2"G |
| 071-1502-600 | Air-water 20 bar | brass | viton | F1"G – M1"G |
| 071-1505-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G – M3/8"G |
| 071-1505-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G – M1/2"G |
| 071-1506-400 | Oil 160 bar | galvanized steel | polyurethane | M1/2"G – M1/2"G |
| 071-1506-500 | Oil 160 bar | galvanized steel | polyurethane | M3/4"G – M3/4"G |
| 071-1506-600 | Oil 160 bar | galvanized steel | polyurethane | M1"G – M1"G |
| 071-1507-300 | Grease 600 bar | galvanized steel | polyurethane | M3/8"G – M3/8"G |
| 071-1508-600 | Diesel 10 bar | galvanized steel | viton | F1"G – M1"G |

S-400



S-460



S-550




S-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | Kg | m ³ | W |
|-------|-----|-----|-----|-----|-----|-----|-----|-----|-------|----------------|---|
| S-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | 0,046 | 1 |
| S-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | 0,060 | 1 |
| S-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | 0,085 | 1 |
| S-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00 | 0,100 | 1 |

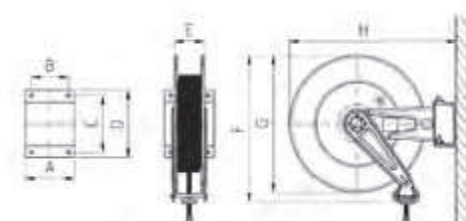



STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR AIR-WATER 20 bar

- Equipped with:
- Polyurethane blue hoses
 - Nickel-plated brass connections
 - Swivelling joint 90° nickel-plated brass
 - Viton seals



| FX-400 | Article | Hose length | Ø hose | Inlet-outlet |
|--------|--------------|--------------|--------|------------------------|
| | 070-2201-300 | Without hose | - | F3/8" G - M3/8" G |
| | 070-2201-400 | Without hose | - | M1/2" G - M1/2" G |
| | 070-2201-215 | 15 m | 8x12 | F3/8" G - M1/4" G gir. |
| | 070-2201-220 | 20 m | 8x12 | F3/8" G - M1/4" G gir. |
| | 070-2201-310 | 10 m | 10x14 | F3/8" G - M3/8" G |
| | 070-2201-315 | 15 m | 10x14 | F3/8" G - M3/8" G |
| | 070-2201-410 | 10 m | 13x19 | M1/2" G - M1/2" G |



| FX-460 | Article | Hose length | Ø hose | Inlet-outlet |
|--------|--------------|--------------|--------|-------------------|
| | 070-2301-400 | Without hose | - | M1/2" G - M1/2" G |
| | 070-2301-320 | 20 m | 10X14 | M1/2" G - M3/8" G |
| | 070-2301-415 | 15 m | 13X19 | M1/2" G - M1/2" G |
| | 070-2301-418 | 18 m | 13X19 | M1/2" G - M1/2" G |



| FX-550 | Article | Hose length | Ø hose | Inlet-outlet |
|--------|--------------|--------------|--------|-------------------|
| | 070-2401-400 | Without hose | - | M1/2" G - M1/2" G |
| | 070-2401-420 | 20 m | 13X19 | M1/2" G - M1/2" G |
| | 070-2401-425 | 25 m | 13X19 | M1/2" G - M1/2" G |



OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<28,00 | 0,085 | 1 |

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|----------------------|
| 071-2201-300 | Without hose | - | F3/8"G - M3/8"G |
| 071-2201-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2201-215 | 15 m | 8x12 | F3/8"G - M1/4"G gir. |
| 071-2201-220 | 20 m | 8x12 | F3/8"G - M1/4"G gir. |
| 071-2201-310 | 10 m | 10x14 | F3/8"G - M3/8"G |
| 071-2201-315 | 15 m | 10x14 | F3/8"G - M3/8"G |
| 071-2201-410 | 10 m | 13x19 | M1/2"G - M1/2"G |

SX-400



| | | | |
|--------------|--------------|-------|-----------------|
| 071-2301-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2301-320 | 20 m | 10X14 | M1/2"G - M3/8"G |
| 071-2301-415 | 15 m | 13X19 | M1/2"G - M1/2"G |
| 071-2301-418 | 18 m | 13X19 | M1/2"G - M1/2"G |

SX-460






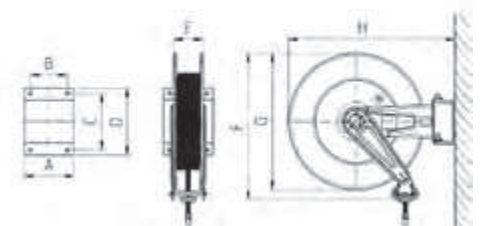
| | | | |
|--------------|--------------|-------|-----------------|
| 071-2401-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2401-420 | 20 m | 13X19 | M1/2"G - M1/2"G |
| 071-2401-425 | 25 m | 13X19 | M1/2"G - M1/2"G |

SX-550



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | <20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | <24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | <29,00 | 0,085 | 1 |






- Equipped with:
- Synthetic black rubber hoses R6
 - Galvanized connections
 - Swivelling joint 90° nickel-plated brass
 - Viton seals



| Article | Hose length | Ø hose | Inlet-outlet |
|---------------|--------------|--------|-----------------|
| FX-400 | | | |
| 070-2201-300 | Without hose | - | F3/8"G - M3/8"G |
| 070-2201-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2202-212 | 12 m | 5/16" | F3/8"G - M1/4"G |
| 070-2202-218 | 18 m | 5/16" | F3/8"G - M1/4"G |
| 070-2202-310 | 10 m | 3/8" | F3/8"G - M3/8"G |
| 070-2202-318 | 18 m | 3/8" | F3/8"G - M3/8"G |
| 070-2202-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| FX-460 | | | |
| 070-2301-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2302-320 | 20 m | 3/8" | M1/2"G - M3/8"G |
| 070-2302-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 070-2302-418 | 18 m | 1/2" | M1/2"G - M1/2"G |
| FX-550 | | | |
| 070-2401-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2402-420 | 20 m | 1/2" | M1/2"G - M1/2"G |
| 070-2402-425 | 25 m | 1/2" | M1/2"G - M1/2"G |
| FX-555 | | | |
| 070-2502-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2502-600 | Without hose | - | F1"G - M1"G |
| 070-2502-430 | 30 m | 1/2" | M1/2"G - M1/2"G |
| 070-2502-515 | 15 m | 3/4" | F3/4"G - M3/4"G |
| 070-2502-520 | 20 m | 3/4" | F3/4"G - M3/4"G |
| 070-2502-615 | 15 m | 1" | F1"G - M1"G |
| FX-560 | | | |
| 070-2602-600 | Without hose | - | F1"G - M1"G |
| 070-2602-530 | 30 m | 3/4" | F3/4"G - M3/4"G |
| 070-2602-540 | 40 m | 3/4" | F3/4"G - M3/4"G |
| 070-2602-620 | 20 m | 1" | F1"G - M1"G |
| 070-2602-630 | 30 m | 1" | F1"G - M1"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR AIR-WATER 20 bar



Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-2201-300 | Without hose | - | F3/8"G - M3/8"G |
| 071-2201-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2202-212 | 12 m | 5/16" | F3/8"G - M1/4"G |
| 071-2202-218 | 18 m | 5/16" | F3/8"G - M1/4"G |
| 071-2202-310 | 10 m | 3/8" | F3/8"G - M3/8"G |
| 071-2202-318 | 18 m | 3/8" | F3/8"G - M3/8"G |
| 071-2202-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 071-2301-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2302-320 | 20 m | 3/8" | M1/2"G - M3/8"G |
| 071-2302-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 071-2302-418 | 18 m | 1/2" | M1/2"G - M1/2"G |
| 071-2401-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2402-420 | 20 m | 1/2" | M1/2"G - M1/2"G |
| 071-2402-425 | 25 m | 1/2" | M1/2"G - M1/2"G |
| 071-2502-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2502-600 | Without hose | - | F1"G - M1"G |
| 071-2502-430 | 30 m | 1/2" | M1/2"G - M1/2"G |
| 071-2502-515 | 15 m | 3/4" | F3/4"G - M3/4"G |
| 071-2502-520 | 20 m | 3/4" | F3/4"G - M3/4"G |
| 071-2502-615 | 15 m | 1" | F1"G - M1"G |

SX-400



SX-460



SX-550




SX-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------|--------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | <20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | <24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | <45,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00 | <54,00 | 0,100 | 1 |

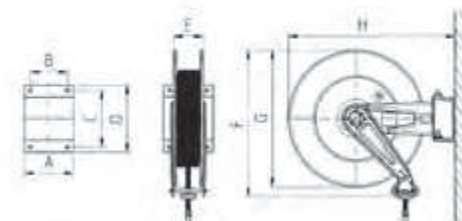

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR WATER 150 °C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



FX-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-2205-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2205-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2204-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 070-2204-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 070-2204-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 070-2204-410 | 10 m | 1/2" | M1/2"G - F1/2"G |



FX-460

| | | | |
|--------------|--------------|-------|-----------------|
| 070-2305-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2305-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2304-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 070-2304-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 070-2304-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 070-2304-415 | 15 m | 1/2" | M1/2"G - F1/2"G |



FX-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-2405-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2405-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2404-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 070-2404-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 070-2404-420 | 20 m | 1/2" | M1/2"G - F1/2"G |



FX-555




| | | | |
|--------------|--------------|------|-----------------|
| 070-2505-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2505-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2504-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 070-2504-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 070-2504-430 | 30 m | 1/2" | M1/2"G - F1/2"G |




FX-560

| | | | |
|--------------|--------------|------|-----------------|
| 070-2605-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2604-340 | 40 m | 3/8" | M1/2"G - F3/8"G |
| 070-2604-440 | 40 m | 1/2" | M1/2"G - F1/2"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

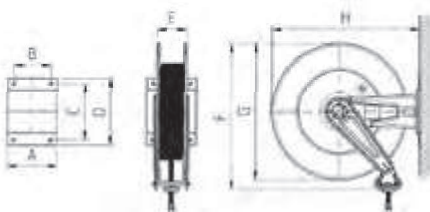

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR WATER 150 °C 200 bar



Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-2205-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2205-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2204-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 071-2204-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 071-2204-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 071-2204-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

SX-400



| | | | |
|--------------|--------------|-------|-----------------|
| 071-2305-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2305-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2304-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 071-2304-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 071-2304-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 071-2304-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

SX-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-2405-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2405-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2404-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 071-2404-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 071-2404-420 | 20 m | 1/2" | M1/2"G - F1/2"G |

SX-550




| | | | |
|--------------|--------------|------|-----------------|
| 071-2505-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2505-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2504-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 071-2504-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 071-2504-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

SX-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

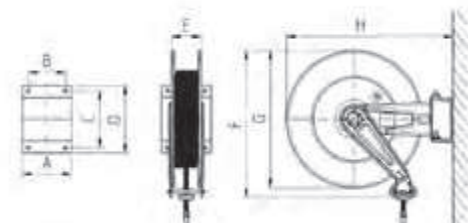

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR WATER 150 °C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



FX-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-2205-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2205-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2205-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 070-2205-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 070-2205-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 070-2205-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

FX-460

| | | | |
|--------------|--------------|-------|-----------------|
| 070-2305-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2305-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2305-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 070-2305-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 070-2305-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 070-2305-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

FX-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-2405-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2405-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2405-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 070-2405-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 070-2405-420 | 20 m | 1/2" | M1/2"G - F1/2"G |




FX-555


| | | | |
|--------------|--------------|------|-----------------|
| 070-2505-300 | Without hose | - | M3/8"G - M3/8"G |
| 070-2505-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2505-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 070-2505-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 070-2505-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

FX-560

| | | | |
|--------------|--------------|------|-----------------|
| 070-2605-400 | Without hose | - | M1/2"G - M1/2"G |
| 070-2605-340 | 40 m | 3/8" | M1/2"G - F3/8"G |
| 070-2605-440 | 40 m | 1/2" | M1/2"G - F1/2"G |

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

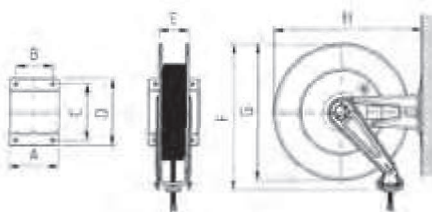

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR WATER 150 °C 400 bar



Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 071-2205-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2205-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2205-210 | 10 m | 5/16" | M3/8"G - F3/8"G |
| 071-2205-215 | 15 m | 5/16" | M3/8"G - F3/8"G |
| 071-2205-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 071-2205-410 | 10 m | 1/2" | M1/2"G - F1/2"G |

SX-400



| | | | |
|--------------|--------------|-------|-----------------|
| 071-2305-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2305-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2305-220 | 20 m | 5/16" | M3/8"G - F3/8"G |
| 071-2305-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 071-2305-318 | 18 m | 3/8" | M3/8"G - F3/8"G |
| 071-2305-415 | 15 m | 1/2" | M1/2"G - F1/2"G |

SX-460



| | | | |
|--------------|--------------|------|-----------------|
| 071-2405-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2405-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2405-320 | 20 m | 3/8" | M3/8"G - F3/8"G |
| 071-2405-325 | 25 m | 3/8" | M3/8"G - F3/8"G |
| 071-2405-420 | 20 m | 1/2" | M1/2"G - F1/2"G |

SX-550




| | | | |
|--------------|--------------|------|-----------------|
| 071-2505-300 | Without hose | - | M3/8"G - M3/8"G |
| 071-2505-400 | Without hose | - | M1/2"G - M1/2"G |
| 071-2505-330 | 30 m | 3/8" | M3/8"G - F3/8"G |
| 071-2505-425 | 25 m | 1/2" | M1/2"G - F1/2"G |
| 071-2505-430 | 30 m | 1/2" | M1/2"G - F1/2"G |

SX-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50<20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50<24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |

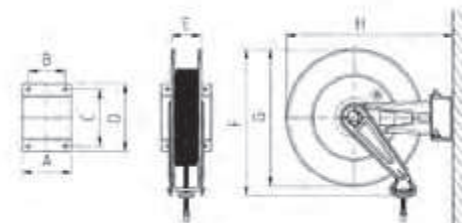



STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR DIESEL 10 bar

- Equipped with:
- Antistatic black rubber hoses
 - Galvanized connections
 - Swivelling joint 90° galvanized
 - Viton seals



FX-550

| Article | Delivery | Hose length | Ø hose | Inlet-outlet |
|--------------|----------|--------------|--------|---------------|
| 070-2408-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-2408-510 | 90 l/min | 10 m | 3/4" | F1" G - M1" G |
| 070-2408-515 | 85 l/min | 15m | 3/4" | F1" G - M1" G |
| 070-2408-610 | 95 l/min | 10m | 1" | F1" G - M1" G |




FX-555

| | | | | |
|--------------|----------|--------------|------|---------------|
| 070-2508-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-2508-520 | 83 l/min | 20 m | 3/4" | F1" G - M1" G |
| 070-2508-615 | 90 l/min | 15 m | 1" | F1" G - M1" G |






FX-560

| | | | | |
|--------------|----------|--------------|------|---------------|
| 070-2608-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 070-2608-530 | 80 l/min | 30 m | 3/4" | F1" G - M1" G |
| 070-2608-540 | 75 l/min | 40 m | 3/4" | F1" G - M1" G |
| 070-2608-620 | 87 l/min | 20 m | 1" | F1" G - M1" G |
| 070-2608-630 | 85 l/min | 30 m | 1" | F1" G - M1" G |

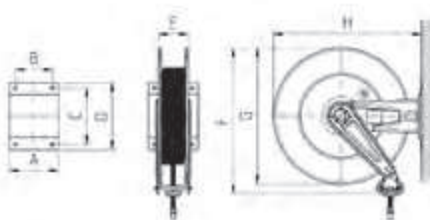

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H |  Kg |  m ³ |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|--|--|---|
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00<53,00 | 0,100 | 1 |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00<83,00 | 0,180 | 1 |

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR DIESEL 10 bar



Equipped with:

- Antistatic black rubber hoses
- Galvanized connections
- Swivelling joint 90° galvanized
- Viton seals

| Article | Delivery | Hose length | Ø hose | Inlet-outlet |
|--------------|----------|--------------|--------|---------------|
| 071-2408-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 071-2408-510 | 90 l/min | 10 m | 3/4" | F1" G - M1" G |
| 071-2408-515 | 85 l/min | 15m | 3/4" | F1" G - M1" G |
| 071-2408-610 | 95 l/min | 10m | 1" | F1" G - M1" G |

SX-550






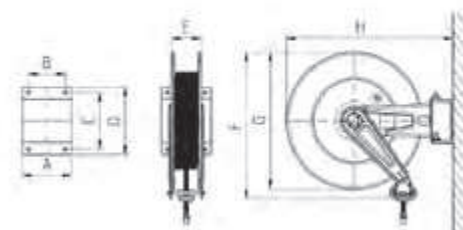
| | | | | |
|--------------|----------|--------------|------|---------------|
| 071-2508-600 | 95 l/min | Without hose | - | F1" G - M1" G |
| 071-2508-520 | 83 l/min | 20 m | 3/4" | F1" G - M1" G |
| 071-2508-615 | 90 l/min | 15 m | 1" | F1" G - M1" G |

SX-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00<45,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00<54,00 | 0,100 | 1 |





STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar

Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals



FX-400

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 070-2209-400 | Without hose | - | M1/2”G – M1/2”G |
| 070-2209-410 | 10 m | 1/2” | M1/2”G – M1/2”G |




FX-460

| | | | |
|--------------|--------------|------|-----------------|
| 070-2309-400 | Without hose | - | M1/2”G – M1/2”G |
| 070-2309-415 | 15 m | 1/2” | M1/2”G – M1/2”G |



FX-550

| | | | |
|--------------|--------------|------|-----------------|
| 070-2409-500 | Without hose | - | F3/4”G – M3/4”G |
| 070-2409-510 | 10 m | 3/4” | F3/4”G – M3/4”G |
| 070-2409-515 | 15 m | 3/4” | F3/4”G – M3/4”G |

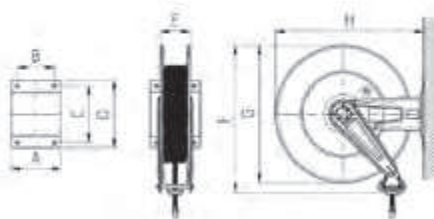

OVERALL DIMENSIONS FIXED

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------------|-------|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50<19,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50<23,00 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00<45,00 | 0,085 | 1 |

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING FOR ANTIFREEZE – WINDSCREEN – ADBLUE 20 bar



Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals




| Article | Hose length | Ø hose | Inlet-outlet | SX-400 |
|--------------|--------------|--------|-----------------|--------|
| 071-2209-400 | Without hose | - | M1/2"G – M1/2"G | |
| 071-2209-410 | 10 m | 1/2" | M1/2"G – M1/2"G | |


| | | | | |
|--------------|--------------|------|-----------------|--------|
| 071-2309-400 | Without hose | - | M1/2"G – M1/2"G | SX-460 |
| 071-2309-415 | 15 m | 1/2" | M1/2"G – M1/2"G | |

| | | | | |
|--------------|--------------|------|-----------------|--------|
| 071-2409-500 | Without hose | - | F3/4"G – M3/4"G | SX-550 |
| 071-2409-510 | 10 m | 3/4" | F3/4"G – M3/4"G | |
| 071-2409-515 | 15 m | 3/4" | F3/4"G – M3/4"G | |



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H |  |  |  | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|--|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | <20,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | <24,00 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | <45,00 | 0,085 | 1 |

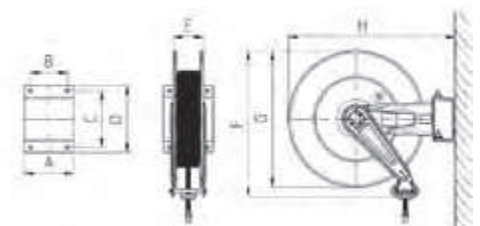

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 FIXED WITHOUT HOSE



FX-400

| Article | Type of delivery fluid | Swivelling joint 90° | Seals | Inlet-outlet |
|--------------|------------------------------|----------------------|-------|-----------------|
| 070-2201-300 | Air-water 20 bar | brass | viton | F3/8"G - M3/8"G |
| 070-2201-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 070-2205-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 070-2205-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2209-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G - M1/2"G |



FX-460

| | | | | |
|--------------|------------------------------|-----------------|-------|-----------------|
| 070-2301-400 | Air-water 20 bar | Brass | viton | M1/2"G - M1/2"G |
| 070-2305-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 070-2305-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G - M1/2"G |



FX-550

| | | | | |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2401-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 070-2405-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 070-2405-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2408-600 | Diesel 10 bar | galvanized steel | viton | F1"G - M1"G |
| 070-2409-500 | Adblue 20 bar | stainless steel | viton | F3/4"G - M3/4"G |



FX-555

| | | | | |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2502-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 070-2502-600 | Air-water 20 bar | brass | viton | F1"G - M1"G |
| 070-2505-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 070-2505-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2508-600 | Diesel 10 bar | galvanized steel | viton | F1"G - M1"G |






FX-560

| | | | | |
|--------------|---------------------|------------------|-------|-----------------|
| 070-2602-600 | Air-water 20 bar | brass | viton | F1"G - M1"G |
| 070-2605-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 070-2608-600 | Diesel 10 bar | galvanized steel | viton | F1"G - M1"G |

OVERALL DIMENSIONS FIXED



| Mod. | A | B | C | D | E | F | G | H |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| FX-400 | 158 | 120 | 168 | 192 | 95 | 450 | 400 | 435 | 12,50 | 0,046 | 1 |
| FX-460 | 158 | 120 | 168 | 192 | 95 | 480 | 460 | 500 | 16,50 | 0,060 | 1 |
| FX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 600 | 22,00 | 0,085 | 1 |
| FX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 600 | 26,00 | 0,100 | 1 |
| FX-560 | 440 | 390 | 225 | 270 | 360 | 590 | 550 | 600 | 33,00 | 0,180 | 1 |

STAINLESS STEEL AUTOMATIC HOSE REELS AISI 304 SWIVELLING WITHOUT HOSE



| Article | Type of delivery fluid | Swivelling joint 90° | Seals | Inlet-outlet |
|--------------|------------------------------|----------------------|-------|-----------------|
| 071-2201-300 | Air-water 20 bar | brass | viton | F3/8"G - M3/8"G |
| 071-2201-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 071-2205-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 071-2205-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 071-2209-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G - M1/2"G |

SX-400



| | | | | |
|--------------|------------------------------|-----------------|-------|-----------------|
| 071-2301-400 | Air-water 20 bar | Brass | viton | M1/2"G - M1/2"G |
| 071-2305-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 071-2305-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 071-2309-400 | Antifreeze-windscreen 20 bar | stainless steel | viton | M1/2"G - M1/2"G |

SX-460



| | | | | |
|--------------|---------------------|------------------|-------|-----------------|
| 071-2401-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 071-2405-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 071-2405-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 071-2408-600 | Diesel 10 bar | galvanized steel | viton | F1"G - M1"G |
| 071-2409-500 | Adblue 20 bar | stainless steel | viton | F3/4"G - M3/4"G |

SX-550




| | | | | |
|--------------|---------------------|------------------|-------|-----------------|
| 071-2502-400 | Air-water 20 bar | brass | viton | M1/2"G - M1/2"G |
| 071-2502-600 | Air-water 20 bar | brass | viton | F1"G - M1"G |
| 071-2505-300 | Water 150°C 400 bar | stainless steel | viton | M3/8"G - M3/8"G |
| 071-2505-400 | Water 150°C 400 bar | stainless steel | viton | M1/2"G - M1/2"G |
| 071-2508-600 | Diesel 10 bar | galvanized steel | viton | F1"G - M1"G |

SX-555



OVERALL DIMENSIONS SWIVELLING

| Mod. | A | B | C | D | E | F | G | H | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|-----|-------|-------|---|
| SX-400 | 150 | 120 | 168 | 196 | 95 | 450 | 400 | 510 | 13,50 | 0,046 | 1 |
| SX-460 | 150 | 120 | 168 | 196 | 95 | 480 | 460 | 575 | 17,50 | 0,060 | 1 |
| SX-550 | 200 | 150 | 225 | 270 | 120 | 590 | 550 | 680 | 23,00 | 0,085 | 1 |
| SX-555 | 250 | 200 | 225 | 270 | 170 | 590 | 550 | 680 | 27,00 | 0,100 | 1 |

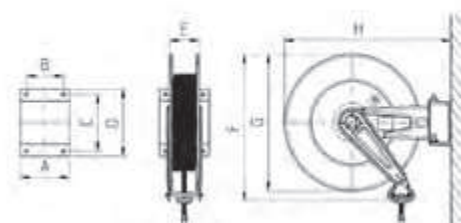



CLOSED AUTOMATIC HOSE REELS

These closed automatic hose reels with spring, fixed or swivelling , in plastic, powder coated , stainless steel AISI 304 are suitable for flexible hoses for the delivery of compressed air, water, oil and similar, grease, diesel, antifreeze liquid, windscreen liquid.

The spring hose allows to untwist only the necessary length, improving the working and functionality.

The hose winding is fast and safe and it allows a work place which give the possibility to work in a free and tidy way, you have always a ready equipment giving to all staffs the warranty to work in a safety way.



CLOSED HOSE REELS IN PLASTIC SWIVELLING FOR AIR-WATER 10 bar

Equipped with:


- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|-------------|--------|-----------------|
| 075-3401-112 | 12+1 m | 6x10 | F1/4"G - M1/4"G |
| 075-3401-209 | 9+1 m | 8x12 | F1/4"G - M1/4"G |

CS-275



| | | | |
|--------|-------|-------|---|
| | | | |
| CS-275 | 3,400 | 0,018 | 1 |



CLOSED HOSE REELS VARNISHED FIXED FOR AIR-WATER 20 bar

Equipped with:


- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|-------------|--------|----------------------|
| 074-4301-211 | 11+1,5 m | 8x12 | F1/4"G - M1/4"G gir. |

CF-300



| | | | |
|--------|--------|-------|---|
| | | | |
| CF-300 | 11,700 | 0,026 | 1 |

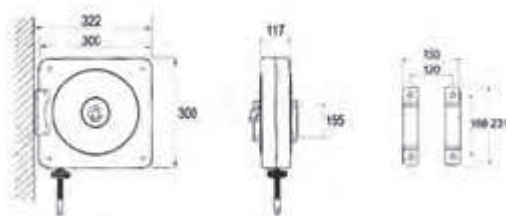

CLOSED HOSE REELS VARNISHED SWIVELLING FOR AIR-WATER 20 bar

Equipped with:


- Polyurethane blue hoses
- Nickel-plated brass connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|-------------|--------|----------------------|
| 075-4301-211 | 11+1,5 m | 8x12 | F1/4"G - M1/4"G gir. |

CS-300



| | | | |
|--------|--------|-------|---|
| | | | |
| CS-300 | 12,440 | 0,026 | 1 |

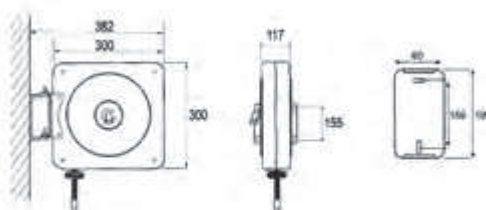

FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4502-300 | Without hose | - | F3/8"G - M3/8"G |
| 074-4502-400 | Without hose | - | M1/2"G - M1/2"G |
| 074-4502-212 | 12 m | 5/16" | F3/8"G - M1/4"G |
| 074-4502-218 | 18 m | 5/16" | F3/8"G - M1/4"G |
| 074-4502-310 | 10 m | 3/8" | F3/8"G - M3/8"G |
| 074-4502-318 | 18 m | 3/8" | F3/8"G - M3/8"G |
| 074-4502-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 074-4502-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 074-4502-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

FOR WATER 150° C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4505-300 | Without hose | - | M3/8"G - M3/8"G |
| 074-4504-210 | 10 m | 5/16" | M3/8"G - M3/8"G |
| 074-4504-215 | 15 m | 5/16" | M3/8"G - M3/8"G |
| 074-4504-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 074-4504-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 074-4504-318 | 18 m | 3/8" | M3/8"G - F3/8"G |

FOR WATER 150° C 400 bar


Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4505-300 | Without hose | - | M3/8"G - M3/8"G |
| 074-4505-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| 074-4505-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| 074-4505-318 | 18 m | 3/8" | M3/8"G - F3/8"G |

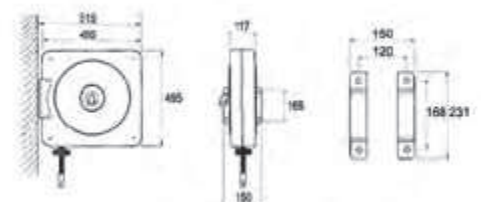

CF-500 22,900<29,850 0,060 1

FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4502-300 | Without hose | - | F3/8”G – M3/8”G |
| 075-4502-400 | Without hose | - | M1/2”G – M1/2”G |
| 075-4502-212 | 12 m | 5/16” | F3/8”G – M1/4”G |
| 075-4502-218 | 18 m | 5/16” | F3/8”G – M1/4”G |
| 075-4502-310 | 10 m | 3/8” | F3/8”G – M3/8”G |
| 075-4502-318 | 18 m | 3/8” | F3/8”G – M3/8”G |
| 075-4502-410 | 10 m | 1/2” | M1/2”G – M1/2”G |
| 075-4502-415 | 15 m | 1/2” | M1/2”G – M1/2”G |
| 075-4502-418 | 18 m | 1/2” | M1/2”G – M1/2”G |

CS-500



FOR WATER 150° C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4505-300 | Without hose | - | M3/8”G – M3/8”G |
| 075-4504-210 | 10 m | 5/16” | M3/8”G – M3/8”G |
| 075-4504-215 | 15 m | 5/16” | M3/8”G – M3/8”G |
| 075-4504-310 | 10 m | 3/8” | M3/8”G – F3/8”G |
| 075-4504-315 | 15 m | 3/8” | M3/8”G – F3/8”G |
| 075-4504-318 | 18 m | 3/8” | M3/8”G – F3/8”G |

CS-500




FOR WATER 150° C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4505-300 | Without hose | - | M3/8”G – M3/8”G |
| 075-4505-310 | 10 m | 3/8” | M3/8”G – F3/8”G |
| 075-4505-315 | 15 m | 3/8” | M3/8”G – F3/8”G |
| 075-4505-318 | 18 m | 3/8” | M3/8”G – F3/8”G |

CS-500

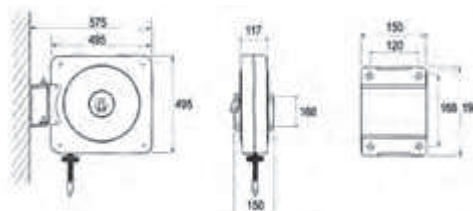

CS-500 23,600<30,550 0,060 1

FOR OIL 160 bar

- Equipped with:
- Synthetic black rubber hoses 1SC
 - Galvanized connections
 - Swivelling joint 90° galvanized
 - Polyurethane seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4506-400 | Without hose | - | M1/2"G - M1/2"G |
| 074-4506-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 074-4506-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 074-4506-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

FOR GREASE 600 bar

- Equipped with:
- Synthetic black rubber hoses 2SC
 - Galvanized connections
 - Swivelling joint 90° galvanized
 - Polyurethane seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4507-200 | Without hose | - | M1/4"G - M1/4"G |
| 074-4507-300 | Without hose | - | M3/8"G - M3/8"G |
| 074-4507-110 | 10 m | 1/4" | M1/4"G - M1/4"G |
| 074-4507-115 | 15 m | 1/4" | M1/4"G - M1/4"G |
| 074-4507-118 | 18 m | 1/4" | M1/4"G - M1/4"G |
| 074-4507-310 | 10 m | 3/8" | M3/8"G - M3/8"G |
| 074-4507-315 | 15 m | 3/8" | M3/8"G - M3/8"G |


FOR ANTIFREEZE AND WINDSCREEN 20 bar

- Equipped with:
- Antistatic black rubber hoses EPDM
 - Stainless steel connections AISI 316
 - Stainless steel swivelling joint 90° AISI 316
 - Viton seals



CF-500

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 074-4509-400 | Without hose | - | M1/2"G - M1/2"G |
| 074-4509-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 074-4509-415 | 15 m | 1/2" | M1/2"G - M1/2"G |

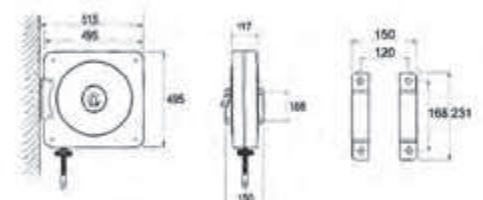

CF-500 22,900<29,850 0,060 1

FOR OIL 160 bar

Equipped with:

- Synthetic black rubber hoses 1SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4506-400 | Without hose | - | M1/2"G - M1/2"G |
| 075-4506-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 075-4506-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| 075-4506-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

CS-500



FOR GREASE 600 bar

Equipped with:

- Synthetic black rubber hoses 2SC
- Galvanized connections
- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4507-200 | Without hose | - | M1/4"G - M1/4"G |
| 075-4507-300 | Without hose | - | M3/8"G - M3/8"G |
| 075-4507-110 | 10 m | 1/4" | M1/4"G - M1/4"G |
| 075-4507-115 | 15 m | 1/4" | M1/4"G - M1/4"G |
| 075-4507-118 | 18 m | 1/4" | M1/4"G - M1/4"G |
| 075-4507-310 | 10 m | 3/8" | M3/8"G - M3/8"G |
| 075-4507-315 | 15 m | 3/8" | M3/8"G - M3/8"G |

CS-500




FOR ANTFREEZE AND WINDSCREEN 20 bar

Equipped with:

- Antistatic black rubber hoses EPDM
- Stainless steel connections AISI 316
- Stainless steel swivelling joint 90° AISI 316
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet |
|--------------|--------------|--------|-----------------|
| 075-4509-400 | Without hose | - | M1/2"G - M1/2"G |
| 075-4509-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| 075-4509-415 | 15 m | 1/2" | M1/2"G - M1/2"G |

CS-500

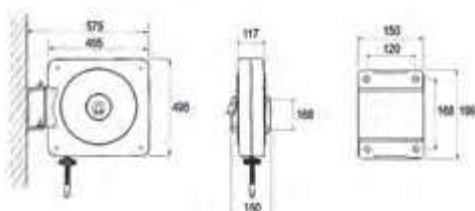

CS-500 23,600<30,550 0,060 1

FOR AIR-WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals



| CFX-500 | Article | Hose length | Ø hose | Inlet-outlet |
|---------|--------------|--------------|--------|-----------------|
| | 074-5502-300 | Without hose | - | F3/8"G - M3/8"G |
| | 074-5502-400 | Without hose | - | M1/2"G - M1/2"G |
| | 074-5502-212 | 12 m | 5/16" | F3/8"G - M1/4"G |
| | 074-5502-218 | 18 m | 5/16" | F3/8"G - M1/4"G |
| | 074-5502-310 | 10 m | 3/8" | F3/8"G - M3/8"G |
| | 074-5502-318 | 18 m | 3/8" | F3/8"G - M3/8"G |
| | 074-5502-410 | 10 m | 1/2" | M1/2"G - M1/2"G |
| | 074-5502-415 | 15 m | 1/2" | M1/2"G - M1/2"G |
| | 074-5502-418 | 18 m | 1/2" | M1/2"G - M1/2"G |

FOR WATER 150 ° C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



| CFX-500 | Article | Hose length | Ø hose | Inlet-outlet |
|---------|--------------|--------------|--------|-----------------|
| | 074-5505-300 | Without hose | - | M3/8"G - M3/8"G |
| | 074-5504-210 | 10 m | 5/16" | M3/8"G - M3/8"G |
| | 074-5504-215 | 15 m | 5/16" | M3/8"G - M3/8"G |
| | 074-5504-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| | 074-5504-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| | 074-5504-318 | 18 m | 3/8" | M3/8"G - F3/8"G |


FOR WATER 150 ° C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals



| CFX-500 | Article | Hose length | Ø hose | Inlet-outlet |
|---------|--------------|--------------|--------|-----------------|
| | 074-5505-300 | Without hose | - | M3/8"G - M3/8"G |
| | 074-5505-310 | 10 m | 3/8" | M3/8"G - F3/8"G |
| | 074-5505-315 | 15 m | 3/8" | M3/8"G - F3/8"G |
| | 074-5505-318 | 18 m | 3/8" | M3/8"G - F3/8"G |

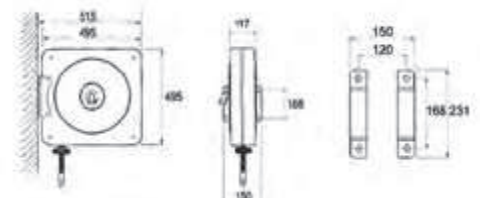

CFX-500 22,900<29,850 0,060 1

FOR AIR WATER 20 bar

Equipped with:

- Synthetic black rubber hoses R6
- Galvanized connections
- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet | CSX-500 |
|--------------|--------------|--------|-----------------|---------|
| 075-5502-300 | Without hose | - | F3/8”G – M3/8”G | |
| 075-5502-400 | Without hose | - | M1/2”G – M1/2”G | |
| 075-5502-212 | 12 m | 5/16” | F3/8”G – M1/4”G | |
| 075-5502-218 | 18 m | 5/16” | F3/8”G – M1/4”G | |
| 075-5502-310 | 10 m | 3/8” | F3/8”G – M3/8”G | |
| 075-5502-318 | 18 m | 3/8” | F3/8”G – M3/8”G | |
| 075-5502-410 | 10 m | 1/2” | M1/2”G – M1/2”G | |
| 075-5502-415 | 15 m | 1/2” | M1/2”G – M1/2”G | |
| 075-5502-418 | 18 m | 1/2” | M1/2”G – M1/2”G | |



FOR WATER 150° C 200 bar

Equipped with:

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet | CSX-500 |
|--------------|--------------|--------|-----------------|---------|
| 075-5505-300 | Without hose | - | M3/8”G – M3/8”G | |
| 075-5504-210 | 10 m | 5/16” | M3/8”G – M3/8”G | |
| 075-5504-215 | 15 m | 5/16” | M3/8”G – M3/8”G | |
| 075-5504-310 | 10 m | 3/8” | M3/8”G – F3/8”G | |
| 075-5504-315 | 15 m | 3/8” | M3/8”G – F3/8”G | |
| 075-5504-318 | 18 m | 3/8” | M3/8”G – F3/8”G | |




FOR WATER 150° C 400 bar

Equipped with:

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Hose length | Ø hose | Inlet-outlet | CSX-500 |
|--------------|--------------|--------|-----------------|---------|
| 075-5505-300 | Without hose | - | M3/8”G – M3/8”G | |
| 075-5505-310 | 10 m | 3/8” | M3/8”G – F3/8”G | |
| 075-5505-315 | 15 m | 3/8” | M3/8”G – F3/8”G | |
| 075-5505-318 | 18 m | 3/8” | M3/8”G – F3/8”G | |

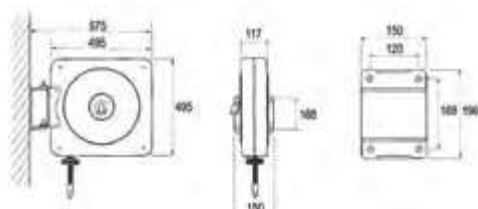

CSX-500 23,600<30,550 0,060 1

These industrial hydraulic hose reels motorized are ideal for particular application that ask strong equipment, they have a very powerful rewinding system.

They permits to use hoses with a very big diameter for fast transfer with a high delivery.



- The **HYDRAULIC** series is feeder by a control from an electric or motored system (the control and the central station are not included), oil pressure MAX 170 bar



- The **PNEUMATIC** series is feeder by a control with a direct link with the air compressed system (the control and the central station are not included), pressure MAX 6-7 bar



- The **ELECTRIC** series is feeder by electrical motor 12-24 V



- The **MANUAL** series is a valid alternative to the spring hose reels, especially when you have big quantity hoses to rewind

INDUSTRIAL HOSE REELS VARNISHED WITHOUT HOSE MOTORIZED HYDRAULIC SERIES



FOR AIR - WATER 20 bar

Equipped with:

- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-6202-600 | MI-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-6302-600 | MI-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-6402-600 | MI-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



MI-630

FOR WATER 150°C 200 bar

Equipped with:

- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-6204-600 | MI-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-6304-600 | MI-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-6404-600 | MI-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |



MI-640

FOR OIL AND SIMILAR 140 bar

Equipped with:

- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-6206-600 | MI-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-6306-600 | MI-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-6406-600 | MI-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



MI-650

FOR GREASE 400 bar

Equipped with:

- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-6207-600 | MI-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-6307-600 | MI-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-6407-600 | MI-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |

FOR DIESEL 10 bar


Equipped with:

- Swivelling joint 90° galvanized
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-6208-600 | MI-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-6308-600 | MI-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-6408-600 | MI-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

OVERALL DIMENSIONS

| Mod. | A | B | C | D | E | F | G | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|----|-------|---|
| MI-630 | 267 | 292 | 610 | 435 | 585 | 511 | 666 | 35 | 0,200 | 1 |
| MI-640 | 267 | 394 | 610 | 533 | 683 | 511 | 666 | 37 | 0,230 | 1 |
| MI-650 | 267 | 508 | 610 | 650 | 800 | 511 | 666 | 41 | 0,266 | 1 |

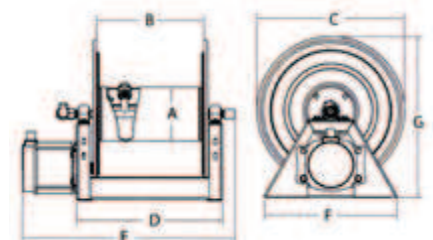



MP-630

FOR AIR - WATER 20 bar

- Equipped with:
- Swivelling joint 90° nickel-plated brass
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-7202-600 | MP-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-7302-600 | MP-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-7402-600 | MP-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

FOR WATER 150 ° C 200 bar

- Equipped with:
- Swivelling joint 90° stainless steel AISI 304
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-7204-600 | MP-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-7304-600 | MP-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-7404-600 | MP-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |



MP-640

FOR OIL AND SIMILAR 140 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-7206-600 | MP-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-7306-600 | MP-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-7406-600 | MP-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

FOR GREASE 400 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-7207-600 | MP-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-7307-600 | MP-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-7407-600 | MP-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |






MP-650


FOR DIESEL 10 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-7208-600 | MP-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-7308-600 | MP-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-7408-600 | MP-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

OVERALL DIMENSIONS

| Mod. | A | B | C | D | E | F | G |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| MP-630 | 267 | 292 | 610 | 435 | 635 | 511 | 666 | 36 | 0,200 | 1 |
| MP-640 | 267 | 394 | 610 | 533 | 733 | 511 | 666 | 38 | 0,230 | 1 |
| MP-650 | 267 | 508 | 610 | 650 | 850 | 511 | 666 | 42 | 0,266 | 1 |

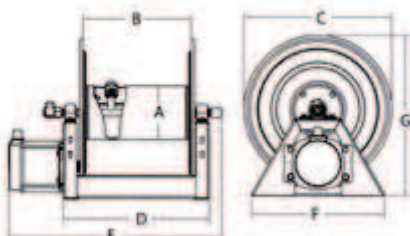

INDUSTRIAL HOSE REELS VARNISHED WITHOUT HOSE MOTORIZED ELECTRICAL SERIES 12 V



FOR AIR - WATER 20 bar

Equipped with:

- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8212-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8312-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8412-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



ME-630

FOR WATER 150°C 200 bar

Equipped with:

- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-8214-600 | ME-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-8314-600 | ME-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-8414-600 | ME-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |



ME-640

FOR OIL AND SIMILAR 140 bar

Equipped with:

- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8216-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8316-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8416-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



ME-650

FOR GREASE 400 bar

Equipped with:

- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-8217-600 | ME-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-8317-600 | ME-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-8417-600 | ME-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |

FOR DIESEL 10 bar


Equipped with:

- Swivelling joint 90° galvanized
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8218-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8318-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8418-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

OVERALL DIMENSIONS

| Mod. | A | B | C | D | E | F | G | | | |
|--------|-----|-----|-----|-----|-----|-----|-----|----|-------|---|
| ME-630 | 267 | 292 | 610 | 435 | 615 | 511 | 666 | 38 | 0,200 | 1 |
| ME-640 | 267 | 394 | 610 | 533 | 713 | 511 | 666 | 41 | 0,230 | 1 |
| ME-650 | 267 | 508 | 610 | 650 | 830 | 511 | 666 | 45 | 0,266 | 1 |

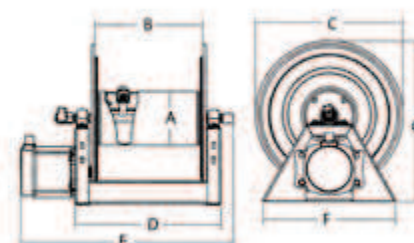



ME-630

FOR AIR - WATER 20 bar

- Equipped with:
- Swivelling joint 90° nickel-plated brass
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8222-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8322-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8422-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



ME-640

FOR WATER 150° C 200 bar

- Equipped with:
- Swivelling joint 90° stainless steel AISI 304
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-8224-600 | ME-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-8324-600 | ME-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-8424-600 | ME-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |

FOR OIL AND SIMILAR 140 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8226-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8326-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8426-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



ME-650

FOR GREASE 400 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Polyurethane seals




| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|--------------|--------------|
| 076-8227-600 | ME-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 076-8327-600 | ME-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 076-8427-600 | ME-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |


FOR DIESEL 10 bar

- Equipped with:
- Swivelling joint 90° galvanized
 - Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|--------|---------------------|-----------|--------------|
| 076-8228-600 | ME-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 076-8328-600 | ME-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 076-8428-600 | ME-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

OVERALL DIMENSIONS

| Mod. | A | B | C | D | E | F | G |  |  |  |
|--------|-----|-----|-----|-----|-----|-----|-----|---|---|---|
| ME-630 | 267 | 292 | 610 | 435 | 615 | 511 | 666 | 42 | 0,200 | 1 |
| ME-640 | 267 | 394 | 610 | 533 | 713 | 511 | 666 | 44 | 0,230 | 1 |
| ME-650 | 267 | 508 | 610 | 650 | 830 | 511 | 666 | 48 | 0,266 | 1 |

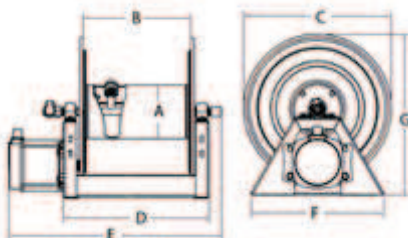

INDUSTRIAL HOSE REELS VARNISHED WITHOUT HOSE MANUAL SERIES



FOR AIR - WATER 20 bar

Equipped with:

- Swivelling joint 90° nickel-plated brass
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|-------|---------------------|-----------|--------------|
| 077-9202-600 | H-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 077-9302-600 | H-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 077-9402-600 | H-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



H-630

FOR WATER 150°C 200 bar

Equipped with:

- Swivelling joint 90° stainless steel AISI 304
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|-------|---------------------|--------------|--------------|
| 077-9204-600 | H-630 | 3/8" - 80 m | 1/2" - 70 m | F1"G - M1"G |
| 077-9304-600 | H-640 | 3/8" - 120 m | 1/2" - 100 m | F1"G - M1"G |
| 077-9404-600 | H-650 | 3/8" - 160 m | 1/2" - 140 m | F1"G - M1"G |



H-640

FOR OIL AND SIMILAR 140 bar

Equipped with:

- Swivelling joint 90° galvanized
- Polyurethane seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|-------|---------------------|-----------|--------------|
| 077-9206-600 | H-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 077-9306-600 | H-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 077-9406-600 | H-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |



H-650

FOR DIESEL 10 bar


Equipped with:

- Swivelling joint 90° galvanized
- Viton seals

| Article | Mod. | Hose reels capacity | | Inlet-Outlet |
|--------------|-------|---------------------|-----------|--------------|
| 077-9208-600 | H-630 | 3/4" - 45 m | 1" - 30 m | F1"G - M1"G |
| 077-9308-600 | H-640 | 3/4" - 76 m | 1" - 46 m | F1"G - M1"G |
| 077-9408-600 | H-650 | 3/4" - 91 m | 1" - 61 m | F1"G - M1"G |

OVERALL DIMENSIONS

| Mod. | A | B | C | D | E | F | G | | | |
|-------|-----|-----|-----|-----|-----|-----|-----|----|-------|---|
| H-630 | 267 | 292 | 610 | 435 | 725 | 511 | 666 | 34 | 0,200 | 1 |
| H-640 | 267 | 394 | 610 | 533 | 823 | 511 | 666 | 36 | 0,230 | 1 |
| H-650 | 267 | 508 | 610 | 650 | 940 | 511 | 666 | 40 | 0,266 | 1 |

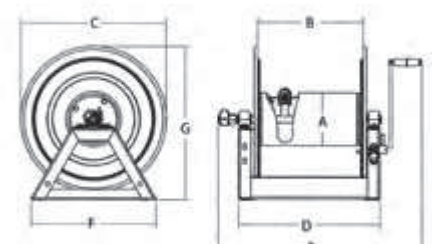

The MANUAL hose reels are a valid alternative to the spring hose reels especially when you have big quantity hoses to rewind.



079-1779-002

Art. 079-1779-002

Panel support 2 hose reels

For the application hose reels
Mod. F-400 – F-460 – F-550 – CF-550
Dimensions 590X390X65 mm



079-1779-003

Art. 079-1779-003

Panel support 3 hose reels

For the application hose reels
Mod. F-400 – F-460 – F-550 – CF-550
Dimensions 860X390X65 mm



079-1779-004

Art. 079-1779-004

Panel support 4 hose reels

For the application hose reels
Mod. F-400 – F-460 – F-550 – CF-550
Dimensions 1113X390X65 mm



| | | | |
|---------------------|--------|-------|---|
| 079-1779-002 | 8,800 | 0,216 | 1 |
| 079-1779-003 | 12,000 | 0,313 | 1 |
| 079-1779-004 | 15,300 | 0,400 | 1 |



024-1785-000


Art. 024-1785-000

Support for picking up drops modular for oil nozzles

Equipped with removable basin
Applied under hose reels is a practise side for nozzle ,
preserve the work place clean and safety



| | | | |
|---------------------|-------|-------|---|
| 024-1785-000 | 3,400 | 0,030 | 1 |
|---------------------|-------|-------|---|



ACCESSORIES FOR HOSE REELS

ROTARY SUPPORT WITH FAST CONNECTION



Art. 079-1777-150

Rotary support varnished

For fixed hose reels Mod. F-400 – F460 – CF-500



079-1777-150



079-1778-150

Art. 079-1778-150

Rotary bracket in stainless steel AISI 304

For fixed hose reels Mod. FX-400 – FX-460 – CFX-500

Art. 079-1777-200

Rotary support varnished

For fixed hose reels Mod. F-550



079-1777-200



079-1778-200

Art. 079-1778-200

Rotary bracket in stainless steel AISI 304

For fixed hose reels Mod. FX-550

Art. 079-1777-250

Rotary support varnished

For fixed hose reels Mod. F-555



079-1777-250



079-1778-250

Art. 079-1778-250

Rotary bracket in stainless steel AISI 304

For fixed hose reels Mod. FX-555

Art. 079-1776-000

Double fixed bracket varnished

For closed hose reels Mod. CF-500



079-1776-000




079-1775-000

Art. 079-1775-000


Double fixed bracket in stainless steel AISI 304

For closed hose reels Mod. CFX-500


OVERALL DIMENSION BRACKET




F-400/460
FX-400/460



F-550
FX-550



F-555
FX-555



CF-300/500
CFX-500

ACCESSORIES FOR HOSE REELS SWIVELLING JOINT 90°



079-1770-003



079-1770-004

Art. 079-1770-003

Swivelling joint 90° AIR-WATER 20 bar F 3/8\"G
brass, viton seals

Art. 079-1770-004

Swivelling joint 90° AIR-WATER 20 bar F 1/2\"G
brass, viton seals



079-1770-005



079-1770-006

Art. 079-1770-005

Swivelling joint 90° AIR-WATER 20 bar F 3/4\"G
brass, viton seals

Art. 079-1770-006

Swivelling joint 90° AIR-WATER 20 bar F 1\"G
brass, viton seals



079-1771-003



079-1771-004

Art. 079-1771-003

Swivelling joint 90° WATER 150° C-400 bar F 3/8\"G
stainless steel AISI 304, viton seals

Art. 079-1771-004

Swivelling joint 90° WATER 150° C-400 bar F 1/2\"G
stainless steel AISI 304, viton seals



079-1771-005



079-1771-006

Art. 079-1771-005

Swivelling joint 90° WATER 20 bar F 3/4\"G
stainless steel AISI 304, viton seals

Art. 079-1771-006

Swivelling joint 90° WATER 100 bar F 1\"G
stainless steel AISI 304, viton seals



079-1772-004



079-1772-005



079-1772-006

Art. 079-1772-004

Swivelling joint 90° OIL 160 bar M 1/2\"G
galvanized steel, polyurethane seals

Art. 079-1772-005

Swivelling joint 90° OIL 105 bar M 3/4\"G
galvanized steel, polyurethane seals

Art. 079-1772-006

Swivelling joint 90° OIL 88 bar M 1\"G
galvanized steel, polyurethane seals



079-1773-002



079-1773-003

Art. 079-1773-002

Swivelling joint 90° GREASE 600 bar M 1/4\"G
galvanized steel, polyurethane seals

Art. 079-1773-003

Swivelling joint 90° GREASE 600 bar M 3/8\"G
galvanized steel, polyurethane seals



079-1774-006

Art. 079-1774-006

Swivelling joint 90° DIESEL 10 bar F 1\"G
galvanized steel, viton seals

Art. F96-0050-322

Fastening bush M3/8"G - F22X1,5



F96-0050-322

Art. F96-0100-302

Galvanized nipple M3/8"G - M1/4"G

Art. F96-0100-303

Galvanized nipple M3/8"G - M3/8"G

Art. F96-0100-402

Galvanized nipple M1/2"G - M1/4"G

Art. F96-0100-403

Galvanized nipple M1/2"G - M3/8"G

Art. F96-0100-404

Galvanized nipple M1/2"G - M1/2"G

Art. F96-0100-504

Galvanized nipple M3/4"G - M1/2"G

Art. F96-0100-505

Galvanized nipple M3/4"G - M3/4"G

Art. F96-0100-605

Galvanized nipple M1"G - M3/4"G

Art. F96-0100-606

Galvanized nipple M1"G - M1"G



Art. F96-1100-303

Stainless steel nipple AISI 304 M3/8"G - M3/8"G

Art. F96-1100-403

Stainless steel nipple AISI 304 M1/2"G - M3/8"G

Art. F96-1100-404

Stainless steel nipple AISI 304 M1/2"G - M1/2"G

Art. F96-1100-504

Stainless steel nipple AISI 304 M3/4"G - M1/2"G

Art. F96-1100-505

Stainless steel nipple AISI 304 M3/4"G - M3/4"G

Art. F96-1100-605

Stainless steel nipple AISI 304 M1"G - M3/4"G

Art. F96-1100-606

Stainless steel nipple AISI 304 M1"G - M1"G



Art. F96-0210-304

Galvanized extension M3/8"G - F1/2"G

Art. F96-0210-404

Galvanized extension M1/2"G - F1/2"G

Art. F96-0210-405

Galvanized extension M1/2"G - F3/4"G

Art. F96-0210-505

Galvanized extension M3/4"G - M3/4"G





Art. 079-1780-001

Rubber hose stop for 1/4" ø 12 mm hoses

Art. 079-1780-002

Rubber hose stop for da 5/16" ø 15 mm hoses

Art. 079-1780-003

Rubber hose stop for 3/8" ø 17 mm hoses

Art. 079-1780-004

Rubber hose stop for 1/2" ø 19 mm hoses

Art. 079-1780-005

Rubber hose stop for 3/4" ø 26 mm hoses

Art. 079-1780-006

Rubber hose stop for 1" ø 35 mm hoses

CONNECTION HOSES FOR HOSE REELS SYSTEM EQUIPMENT



| Article | Length | Characteristics | Pressure | Dimensions | Inlet-Outlet |
|--------------|--------|------------------|----------|------------|---------------------|
| 901-0323-006 | 0,6 m | Polyurethane | 20 bar | 10X14 | F3/8"G - F3/8"G |
| 901-0424-006 | 0,6 m | Polyurethane | 20 bar | 13X19 | F1/2"G - F1/2"G |
| 901-0302-015 | 1,5 m | Polyurethane | 20 bar | 8X12 | M3/8"G - F1/4"G |
| 901-0302-020 | 2,0 m | Polyurethane | 20 bar | 8X12 | M1/4"G - F1/4"G |
| 901-0303-020 | 2,0 m | Polyurethane | 20 bar | 10X14 | M3/8"G - F3/8"G |
| 901-0404-020 | 2,0 m | Polyurethane | 20 bar | 13X19 | M1/2"G - F1/2"G |
| 902-0222-010 | 1,0 m | Black rubber R6 | 20 bar | 5/16" | F3/8"G - F3/8"G |
| 902-0222-020 | 2,0 m | Black rubber R6 | 20 bar | 5/16" | F3/8"G - F3/8"G |
| 902-0323-006 | 0,6 m | Black rubber R6 | 20 bar | 3/8" | F3/8"G - F3/8"G |
| 902-0323-010 | 1,0 m | Black rubber R6 | 20 bar | 3/8" | F3/8"G - F3/8"G |
| 902-0323-020 | 2,0 m | Black rubber R6 | 20 bar | 3/8" | F3/8"G - F3/8"G |
| 902-0424-006 | 0,6 m | Black rubber R6 | 20 bar | 1/2" | F1/2"G - F1/2"G |
| 902-0424-010 | 1,0 m | Black rubber R6 | 20 bar | 1/2" | F1/2"G - F1/2"G |
| 902-0424-020 | 2,0 m | Black rubber R6 | 20 bar | 1/2" | F1/2"G - F1/2"G |
| 902-0525-006 | 0,6 m | Black rubber R6 | 20 bar | 3/4" | F3/4"G - F3/4"G |
| 902-0626-006 | 0,6 m | Black rubber R6 | 20 bar | 1" | F1"G - F1"G |
| 904-0323-006 | 0,6 m | Hydroblu 1SC | 200 bar | 3/8" | F3/8"G-F3/8"G |
| 904-0424-006 | 0,6 m | Hydroblu 1SC | 200 bar | 1/2" | F1/2"G-F1/2"G |
| 905-0323-006 | 0,6 m | Hydroblu 2SC | 400 bar | 3/8" | F3/8"G-F3/8"G |
| 905-0424-006 | 0,6 m | Hydroblu 2SC | 400 bar | 1/2" | F1/2"G-F1/2"G |
| 906-0424-006 | 0,6 m | Black rubber 1SC | 160 bar | 1/2" | F1/2"G - F1/2"G |
| 906-0434-008 | 0,8 m | Black rubber 1SC | 160 bar | 1/2" | F90° 1/2"G - F1/2"G |
| 906-0424-015 | 1,5 m | Black rubber 1SC | 160 bar | 1/2" | F1/2"G - F1/2"G |
| 906-0424-020 | 2,0 m | Black rubber 1SC | 160 bar | 1/2" | F1/2"G - F1/2"G |
| 906-0525-006 | 0,6 m | Black rubber 1SC | 105 bar | 3/4" | F3/4"G - F3/4"G |
| 906-0535-008 | 0,8 m | Black rubber 1SC | 105 bar | 3/4" | F90° 3/4"G - F3/4"G |
| 906-0626-006 | 0,6 m | Black rubber 1SC | 88 bar | 1" | F1"G - F1"G |
| 906-0636-008 | 0,8 m | Black rubber 1SC | 88 bar | 1" | F90° 1"G - F1"G |
| 907-0121-006 | 0,6 m | Black rubber 2SC | 600 bar | 1/4" | F1/4"G - F1/4"G |
| 907-0131-008 | 0,8 m | Black rubber 2SC | 600 bar | 1/4" | F90° 1/4"G - F1/4"G |
| 907-0323-006 | 0,6 m | Black rubber 2SC | 600 bar | 3/8" | F3/8"G - F3/8"G |
| 907-0333-008 | 0,8 m | Black rubber 2SC | 600 bar | 3/8" | F90° 3/8"G - F3/8"G |

AIR-WATER 20 bar

- Polyurethane blue hoses
- Connection nichel-plated brass

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 901-0102-120 | 12 m | 1/4" | 6X10 | F1/4"G - M1/4"G |
| 901-0202-090 | 9 m | 5/16" | 8X12 | F1/4"G - M1/4"G |
| 901-0212-110 | 11 m | 5/16" | 8X12 | M3/8"G - M1/4"G |
| 901-0202-120 | 12 m | 5/16" | 8X12 | F3/8"G - M1/4"G |
| 901-0202-150 | 15 m | 5/16" | 8X12 | F3/8"G - M1/4"G |
| 901-0202-200 | 20 m | 5/16" | 8X12 | F3/8"G - M1/4"G |
| 901-0303-100 | 10 m | 3/8" | 10X14 | F3/8"G - M3/8"G |
| 901-0303-150 | 15 m | 3/8" | 10X14 | F3/8"G - M3/8"G |
| 901-0303-200 | 20 m | 3/8" | 10X14 | F3/8"G - M3/8"G |
| 901-0404-100 | 10 m | 1/2" | 13X19 | F1/2"G - M1/2"G |
| 901-0404-150 | 15 m | 1/2" | 13X19 | F1/2"G - M1/2"G |
| 901-0404-180 | 18 m | 1/2" | 13X19 | F1/2"G - M1/2"G |
| 901-0404-200 | 20 m | 1/2" | 13X19 | F1/2"G - M1/2"G |
| 901-0404-250 | 25 m | 1/2" | 13X19 | F1/2"G - M1/2"G |



AIR-WATER 20 bar

- Synthetic black rubber hoses R6
- Galvanized connections

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 902-0203-120 | 12 m | 5/16" | 7,9X14,3 | F3/8"G - M3/8"G |
| 902-0203-180 | 18 m | 5/16" | 7,9X14,3 | F3/8"G - M3/8"G |
| 902-0303-100 | 10 m | 3/8" | 9,5X16 | F3/8"G - M3/8"G |
| 902-0303-180 | 18 m | 3/8" | 9,5X16 | F3/8"G - M3/8"G |
| 902-0303-200 | 20 m | 3/8" | 9,5X16 | F3/8"G - M3/8"G |
| 902-0404-100 | 10 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0404-150 | 15 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0404-180 | 18 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0404-200 | 20 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0404-250 | 25 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0404-300 | 30 m | 1/2" | 12,7X19 | F1/2"G - M1/2"G |
| 902-0505-150 | 15 m | 3/4" | 19X25,8 | F3/4"G - M3/4"G |
| 902-0505-200 | 20 m | 3/4" | 19X25,8 | F3/4"G - M3/4"G |
| 902-0505-300 | 30 m | 3/4" | 19X25,8 | F3/4"G - M3/4"G |
| 902-0505-400 | 40 m | 3/4" | 19X25,8 | F3/4"G - M3/4"G |
| 902-0606-150 | 15 m | 1" | 25,4X33,2 | F1"G - M1"G |
| 902-0606-200 | 20 m | 1" | 25,4X33,2 | F1"G - M1"G |
| 902-0606-300 | 30 m | 1" | 25,4X33,2 | F1"G - M1"G |



ANTIFREEZE-WINDSCREEN-ADBLUE 20 bar

- Antistatic black rubber hoses EPDM
- Stainless steel connection AISI 316

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 909-0404-100 | 10 m | 1/2" | 12,7X21 | F1/2"G - M1/2"G |
| 909-0404-150 | 15 m | 1/2" | 12,7X21 | F1/2"G - M1/2"G |
| 909-0505-100 | 10 m | 3/4" | 19X29 | F3/4"G - M3/4"G |
| 909-0505-150 | 15 m | 3/4" | 19X29 | F3/4"G - M3/4"G |



WATER 150 °C 200 bar

- Synthetic rubber hoses no trace blue 1SC
- Galvanized connections
- Rubber blue handle



| Article | Hose length | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 904-0223-100 | 10 m | 5/16" | 7,9X14,5 | F3/8"G – F3/8"G |
| 904-0223-150 | 15 m | 5/16" | 7,9X14,5 | F3/8"G – F3/8"G |
| 904-0223-200 | 20 m | 5/16" | 7,9X14,5 | F3/8"G – F3/8"G |
| 904-0323-100 | 10 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-150 | 15 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-180 | 18 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-200 | 20 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-250 | 25 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-300 | 30 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0323-400 | 40 m | 3/8" | 9,6X16,9 | F3/8"G – F3/8"G |
| 904-0424-100 | 10 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |
| 904-0424-150 | 15 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |
| 904-0424-200 | 20 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |
| 904-0424-250 | 25 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |
| 904-0424-300 | 30 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |
| 904-0424-400 | 40 m | 1/2" | 12,7X20,4 | F1/2"G – F1/2"G |

WATER 150 °C 400 bar

- Synthetic rubber hoses no trace blue 2SC
- Galvanized connections
- Rubber blue handle



| Article | Hose length | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 905-0223-100 | 10 m | 5/16" | 7,9X16 | F3/8"G – F3/8"G |
| 905-0223-150 | 15 m | 5/16" | 7,9X16 | F3/8"G – F3/8"G |
| 905-0223-200 | 20 m | 5/16" | 7,9X16 | F3/8"G – F3/8"G |
| 905-0323-100 | 10 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-150 | 15 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-180 | 18 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-200 | 20 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-250 | 25 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-300 | 30 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0323-400 | 40 m | 3/8" | 9,6X18,3 | F3/8"G – F3/8"G |
| 905-0424-100 | 10 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |
| 905-0424-150 | 15 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |
| 905-0424-200 | 20 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |
| 905-0424-250 | 25 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |
| 905-0424-300 | 30 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |
| 905-0424-400 | 40 m | 1/2" | 12,7X21,4 | F1/2"G – F1/2"G |

OIL AND SIMILAR 160 bar

- Synthetic black rubber hoses 1SC
- Galvanized connections

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 906-0304-100 | 10 m | 3/8" | 9,6X16,9 | F1/2"G - M1/2"G |
| 906-0304-150 | 15 m | 3/8" | 9,6X16,9 | F1/2"G - M1/2"G |
| 906-0404-100 | 10 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0404-150 | 15 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0404-180 | 18 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0404-200 | 20 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0404-250 | 25 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0404-300 | 30 m | 1/2" | 12,7X20,4 | F1/2"G - M1/2"G |
| 906-0505-150 | 15 m | 3/4" | 19X24,4 | F3/4"G - M3/4"G |
| 906-0505-200 | 20 m | 3/4" | 19X24,4 | F3/4"G - M3/4"G |
| 906-0505-250 | 25 m | 3/4" | 19X24,4 | F3/4"G - M3/4"G |
| 906-0505-300 | 30 m | 3/4" | 19X24,4 | F3/4"G - M3/4"G |
| 906-0606-150 | 15 m | 1" | 25,4X34,9 | F1"G - M1"G |
| 906-0606-200 | 20 m | 1" | 25,4X34,9 | F1"G - M1"G |
| 906-0606-300 | 30 m | 1" | 25,4X34,9 | F1"G - M1"G |



GREASE 600 bar

- Synthetic black rubber hoses 2SC
- Galvanized connections

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|-----------------|
| 907-0102-100 | 10 m | 1/4" | 6,4X14,2 | F1/4"G - M1/4"G |
| 907-0102-150 | 15 m | 1/4" | 6,4X14,2 | F1/4"G - M1/4"G |
| 907-0102-180 | 18 m | 1/4" | 6,4X14,2 | F1/4"G - M1/4"G |
| 907-0302-100 | 10 m | 3/8" | 9,6X18,3 | F3/8"G - M1/4"G |
| 907-0302-150 | 15 m | 3/8" | 9,6X18,3 | F3/8"G - M1/4"G |
| 907-0302-200 | 20 m | 3/8" | 9,6X18,3 | F3/8"G - M1/4"G |
| 907-0302-250 | 25 m | 3/8" | 9,6X18,3 | F3/8"G - M1/4"G |
| 907-0302-300 | 30 m | 3/8" | 9,6X18,3 | F3/8"G - M1/4"G |



DIESEL 10 bar

- Antistatic black rubber hoses
- Galvanized connections

| Article | Hose lenght | Ø hose | Dimensions | Inlet-Outlet |
|--------------|-------------|--------|------------|--------------|
| 908-0506-100 | 10 m | 3/4" | 19X27 | F1"G - M1"G |
| 908-0506-150 | 15 m | 3/4" | 19X27 | F1"G - M1"G |
| 908-0506-200 | 20 m | 3/4" | 19X27 | F1"G - M1"G |
| 908-0506-300 | 30 m | 3/4" | 19X27 | F1"G - M1"G |
| 908-0506-400 | 40 m | 3/4" | 19X27 | F1"G - M1"G |
| 908-0606-100 | 10 m | 1" | 25X35 | F1"G - M1"G |
| 908-0606-150 | 15 m | 1" | 25X35 | F1"G - M1"G |
| 908-0606-200 | 20 m | 1" | 25X35 | F1"G - M1"G |
| 908-0606-300 | 30 m | 1" | 25X35 | F1"G - M1"G |







